


SOUFLET CONIQUE

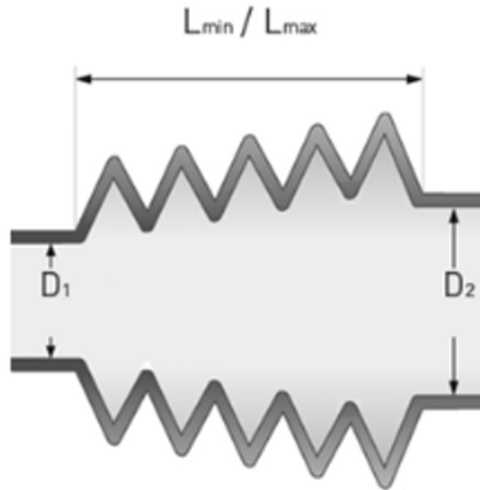

Dimensions en mm

NUMÉRO DE COMMANDE	TAILLE DE LA CONEXION (D1/D2)	L-min	L-max
321002-0116 >>	7/50	20	100
321002-0199 >>	10/24	25	85
321002-0172 >>	10/48	15	75
321002-0294 >>	10/102	40	160
321002-0234 >>	15/44	20	90
321002-0035 >>	15/60	25	110
321002-0092 >>	15/76	30	120
321002-0312 >>	16/27	40	140

Défauts de forme par rapport à l'image possible

SOUFLET CONIQUE

NUMÉRO DE COMMANDE	TAILLE DE LA CONEXION (D1/D2)	Dimensions en mm	
		L-min	L-max
321002-0259 >>	18/35	20	80
321002-0003 >>	20/40	60	225
321002-0370 >>	20/66	20	60
321002-0529 >>	21/65	60	210
321002-0141 >>	22/82	40	190
321002-0541 >>	22/34	20	60
321002-0097 >>	24/60	30	70
321002-0155 >>	24/74	70	240
321002-0147 >>	25/52	30	100
321002-0277 >>	25/80	30	60
321002-0266 >>	25/90	45	175
324002-0073 >>	25/115	50	310
321002-0069 >>	28/48	40	160
321002-0539 >>	28/58	30	100
321002-0188 >>	28/82	30	120
324002-0030 >>	30/106	80	320
324002-0390 >>	30/146	50	260
321002-0049 >>	34/74	30	130
321002-0343 >>	35/99	35	180
321002-0397 >>	38/115	40	160
321002-0237 >>	38/78	40	170
321002-0212 >>	40/52	15	70
321002-0366 >>	47/107	20	60
321002-0015 >>	50/86	10	70
321002-0304 >>	50/90	45	250
321002-0090 >>	50/118	45	230
321002-0060 >>	52/72	30	110
321002-0219 >>	58/102	30	100
324002-0034 >>	60/80	55	240
324002-0336 >>	60/120	60	300
324002-0393 >>	60/134	30	80
324002-0064 >>	60/152	40	240
324002-0038 >>	62/104	70	300
321002-0027 >>	62/89	30	70
324002-0067 >>	70/100	50	250
324002-0157 >>	85/180	30	180
324002-0089 >>	95/160	30	160
324002-0048 >>	100/175	45	320
324002-0343 >>	100/285	40	380
324002-0011 >>	120/155	30	90
324002-0339 >>	120/318	20	250
324002-0379 >>	140/224	50	200
324002-0131 >>	145/200	40	180
321002-0206 >>	155/200	25	120
324002-0088 >>	160/190	15	70
324002-0060 >>	160/220	15	75
324002-0029 >>	180/300	80	280
324002-0236 >>	210/340	30	250