

TB-03

Touch Panel Data Setter TB-03 with Bluetooth Wireless Function



1. Set operating conditions with wireless connection

Position adjustment and operating conditions can be set from outside the equipment, even without a cable connection to the EleCylinder body.

* Actuator operation requires cable connection.



2. Status monitoring makes daily maintenance easier and shortens trouble recovery time

TB-03 can monitor the operating status of up to 16 axes while receiving wireless data from the EleCylinder. Error recovery time also can be shortened by troubleshooting with wireless communication.

Diagram illustrating the status monitoring capabilities of the TB-03 device. The device displays a "Status monitor screen" which provides real-time data for up to 16 axes.

Axis Name Display
Can be configured (changed) arbitrarily according to customer applications.

Status Monitor
Axis status check can be used for confirmation of maintenance timing.


EC2	Servo	Travel Cnt.	52	Alarm Group	Warnin
S/N A70761788	Cur. pos.	Travel Dist.	1 m	Maintenance warning 1	
Select	0.00 mm	Overload Lv.	12 %		

Error Status Monitor
Alarms and warnings are displayed when generated. Useful for troubleshooting.

Troubleshooting screen

3. Supports position/program controller

Dedicated cables can connect the TB-03 to all the controllers. The same functions and operation of the previous TB-02 are available.

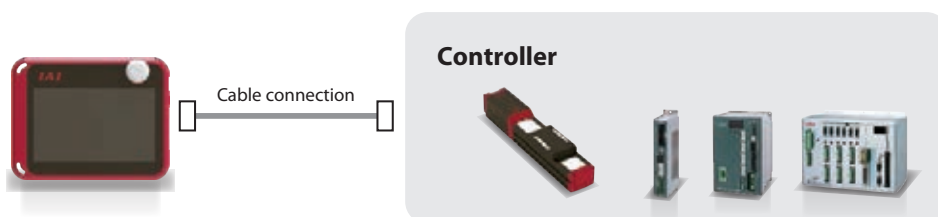

Model Number

One unit supports all controllers, although the cable must be selected in accordance with the controller to be connected. Select the AC adapter for the appropriate operating environment.

Model **TB-03-** Cable - AC adapter

● **Body + cable + AC adapter set model**

Connected controller	Model		Cable	
	Body + cable	AC adapter	For EleCylinder/ position controller	For program controller
EleCylinder Position Controller	TB-03-C	E	① CB-TB3-C050	-
		N (*2)		
Program Controller	TB-03-S	E	-	② CB-TB3-S050 + ③ CB-SEL-SJS002
		N (*2)		
EleCylinder Position Controller Program Controller	TB-03-SC	E	① CB-TB3-C050	② CB-TB3-S050 + ③ CB-SEL-SJS002 (conversion cable) (*3)
		N (*2)		
	TB-03-SCN (*1)	E	-	-
		N (*2)		

(*1) No cable (*2) No AC adapter (*3) Use with the cable ② when connecting to ASEL, PSEL, SSEL, or MSEL

● **Cable single product model number**

Connected controller	Model
EleCylinder Position Controller	① CB-TB3-C050
Program Controller	② CB-TB3-S050
	③ CB-SEL-SJS002 (conversion cable) (*1)


(*1) Use with the cable ② when connecting to ASEL, PSEL, SSEL, or MSEL

● **AC adapter single product model number**

Connected controller	Model	Specification	Single product model number
EleCylinder Position Controller Program Controller	E	For Europe	UNE318-5928

Connection


● **Wireless connection (EleCylinder only)**

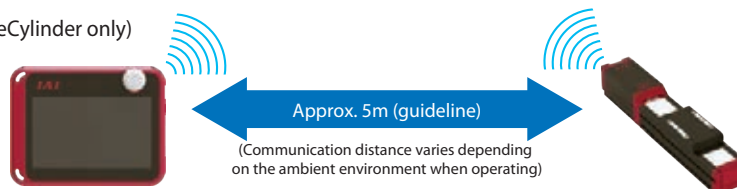

* Connectable only for models with "WL" (wireless communication) option in the model number

Caution: Certification issues limit the countries in which wireless communication can be used. Contact our sales personnel for details.

● **Wired connection (cable connection)**

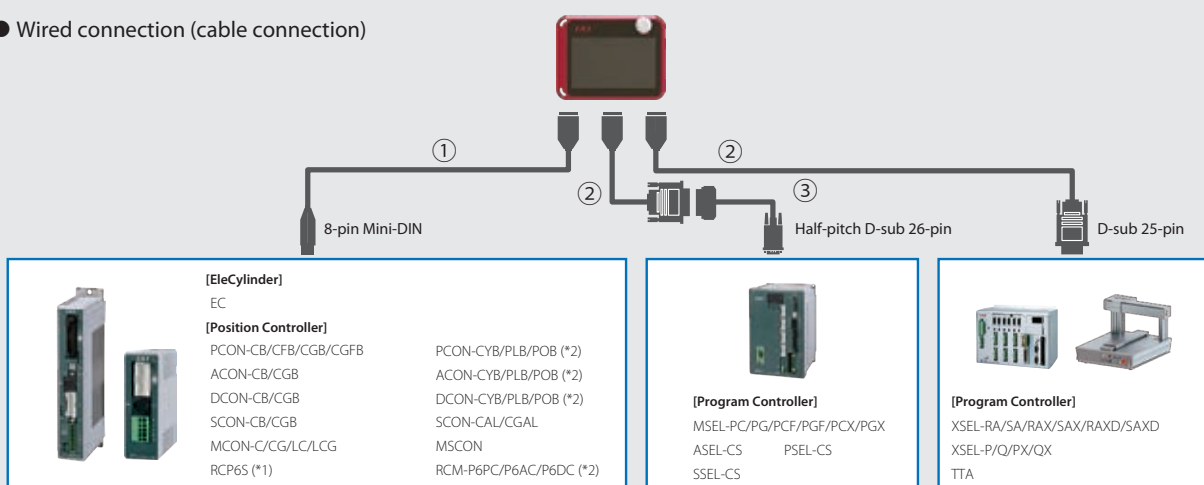

(*1) A gateway unit or PLC connection unit is required in order to operate RCP6S. (*2) Coming soon.

Body Specifications

Power input voltage range	24VDC \pm 10% [supplied from controller]
Power consumption	3.6W or less
Consumption current	150mA (supplied from controller)
Ambient operating temperature	0 to 40°C (no condensation or freezing)
Ambient operating humidity	85% RH or less (no condensation or freezing)
Ambient storage temperature	-20 to 40°C
Vibration resistance	10 to 57Hz Amplitude 0.075mm
Ingress protection	IPX0
Mass	670g (body) + approx. 285g (dedicated cable)
Liquid crystal	7" TFT color WVGA (800 x 480)
External memory	SD/SDHC memory card interface mounted (1G to 32G)
Charging method	Wired connection with dedicated AC adapter/controller
Language support	English/Japanese/Chinese

Wireless Function (only when connected to EleCylinder)

Wireless connection	Bluetooth 4.2 Class 2
Wireless function	Data setter/monitor function
Operation command/stop command	No
Max. number of connectable axes	16 axes
Operation	Battery (AB-7) operation
Wireless operating time	Max. 4 hours (battery driven)
Battery life	Cycle durability 300 times

AC Adapter Common Specifications


Power input voltage range	Single-phase 100 to 240VAC \pm 10%
Power supply current	0.4A max.
Consumption current	2.8A max.
Output voltage	5.9VDC (5.7 to 6.3V)
Charging time	Approx. 3 hours
Cable length	1500 \pm 100mm

Options

● Strap: STR-1



● Spiral cable: SIC-1



● Grip belt: GRP-2




■ Maintenance Parts
Battery unit: AB-7




External Dimensions

● Body

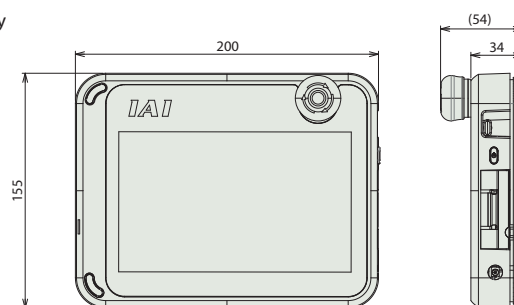

● AC adapter
(for Europe:
UNE318-5928)

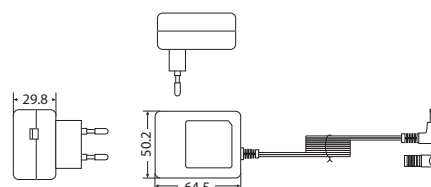

Name of Each Component

