

# Clamping Elements



# The company JAKOB

JAKOB Antriebstechnik GmbH is a leading manufacturer of servo couplings, safety couplings, and mechanical clamping elements internationally.

For more than 40 years JAKOB has been developing and producing various types of torsionally stiff metal bellows couplings and safety couplings for the servo drive industry. Throughout our history we have earned ourselves the reputation of being a reliable and competent partner in the motion control industry.

JAKOB is a market leader in the area of mechanical tool and component clamping with its innovative and unique

clamping technology. The JAKOB wedge clamping technology combines high clamping forces with low actuation torques and maximum operating safety.

The goal of our clamping element catalog is to provide a general overview of our standard product range. More detailed information can be obtained at our homepage [www.jakobantriebstechnik.de](http://www.jakobantriebstechnik.de).

Highly trained engineers and technicians at our facility in Kleinwallstadt are always ready with a solution to best meet your requirements.



2D-drawings in DXF-format or 3D-models in STEP format are available for download at the corresponding site of our homepage. For special dimensions or different drawing types please contact JAKOB.

**Telephone +49(0)6022 2208-0, Telefax +49(0)6022 2208-22**  
**[www.jakobantriebstechnik.de](http://www.jakobantriebstechnik.de), [info@jakobantriebstechnik.de](mailto:info@jakobantriebstechnik.de)**

Technical changes reserved.

Most recent data sheets available on the internet.

Please feel free to contact us about our extensive product range of servo and safety couplings, as well as protective solutions for the motor-spindles of machine tools.



# Directory Clamping Elements I Overview

page

## Mechanical Power Clamping Nut

1-6



- MCA/** // with blind hole thread // thread protected
- MCG** // centered operation // compact design
- // optionally with star- or T-knob (MCA) // with threaded pin (MCG)
- MDA** // with through hole thread // unlimited clamping stroke
- // for variable clamping edges

## Hydromechanical Clamping Nut

7-12



- HMG** // maximum clamping forces over 4,000 kN
- HMP** // multi-piston system with spring and oil return
- HMP-HD** // operating pressure 700 to 1,200 bar
- HVV** // custom thread available

## Mechanical Power Clamping Screws

13-15



- SC** // wedge mechanism as force amplifier
- // high clamping forces at low actuation torques
- // maximum operating safety – self-locking mechanism
- // simple, manual operation

## Mechanical and Hydromechanical Power Clamping Screws

16-20



- MSP/** // high operating travel // maximum reliability
- MSPD** // simple handling and mounting
- // for face plates and jaw boxes
- HSP** // mechanical force amplifier for external clamping direction
- // double acting version for internal and external clamping directions
- // hydromechanical force amplifying for external clamping direction
- // nominal clamping forces up to 750 kN // low actuation torques

## Force Monitoring

21-24



- FMS** // increase in operational safety
- HMD** // confirmation of proper clamping state

## Hydromechanical Spring Clamping Systems

25-30



- ZSF** // spring pressure cylinder (pull)
- ZDF** // spring pressure cylinder (push)
- // mechanical clamping // hydraulically released
- // maximum operating safety // leak-proof and robust
- // nominal clamping forces up to 350 kN

## Sectional Rail Couplings

31-35



- PKV** // coupling/decoupling of sectional rails
- PKH** // vertical/horizontal versions
- // manual or pneumatic operation
- // available for all common rail dimensions

# Clamping Technology I General

## Definition:

Clamping tasks in manufacturing technology are versatile and numerous; the elements and systems supplied will gain ever greater importance in the future due to the requirements placed on short setup and manufacturing times. When selecting suitable clamping equipment, reliability, cost effectiveness, user friendliness and technical details are the most important factors. Additional aspects are increasing quality, flexibility, and ergonomics demands in the work area. Mechanical clamping elements from JAKOB with multiple patented power amplification systems and hydromechanical clamping systems meet the high requirements of the user.


At the same time, they provide a genuine alternative to simple, mechanical clamping equipment (steel ties, brackets, etc.) along with semi- and fully-automatic clamping elements, which usually have highly elaborate energy supplies and control systems. With their low installation costs, the minimal operating and maintenance expenditures and the moderate procurement price, JAKOB clamping elements are often the most cost effective solution. Whether as original equipment or as retrofit elements, JAKOB clamping elements always hold tools and workpieces in position securely.

## Characteristics:

- ✓ highest clamping forces
- ✓ low actuation torques
- ✓ large operation path
- ✓ high operational safety
- ✓ clamping force control
- ✓ easy installation
- ✓ economical clamping technology
- ✓ more humane workplace
- ✓ reduced risk of accidents
- ✓ simple & manual operation or automatic mode
- ✓ versatile application through compact and flexible design

## Clamping elements with power amplification:

This group of clamping elements includes mechanical power clamping screws, power clamping nuts, and sectional rail couplings. They are designed for manual operation with simple handling but at the same time allow very high clamping forces. The manual actuation torque is also used for clamping force monitoring. Various clamping mechanisms such as key systems, planet gears (eccentric principles) and pressure distributors are used for power amplification. The sturdy design, the self-locking feature and a very high overload capacity ensure maximum reliability and long time life in these clamping elements.

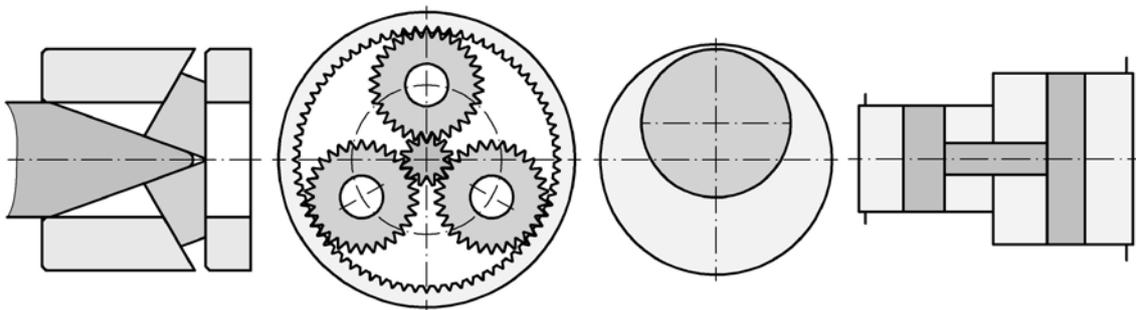

## Hydromechanical spring tension systems

The hydromechanical spring tension system is characterized especially by high reliability and low operating costs. The clamping force is actuated leakproof by a disk spring packet while the hydraulic pressure is only required for the release process. This results in highly compact, sturdy and reliable clamping elements, such as spring clamping cylinders, spring pressure cylinders, spring clamping blocks and spring clamping nuts.

## Clamping hydraulics - multi-piston system

The multi-piston system is a true innovation in the hydraulic clamping sector. Several small pistons which are interconnected using hydraulics can be arranged concentrically or in any other geometric formation. The highest possible clamping forces can be generated thanks to a sealing, guaranteed to be leakproof up to 1,500 bar. Other important benefits worth mentioning are the spring reset in the piston and the oil return during the release process.

**JAKOB**  
Antriebstechnik

**JAKOB**

mechanical & hydromechanical  
**Power Clamping Nuts**



**JAKOB**  
**GRUPPE**

# Mechanical Power Clamping Nut I Series MCA/MDA

- ✓ maximum clamping forces through force amplification
- ✓ simple & manual operation – low actuation torques
- ✓ high operational safety through self-locking mechanism
- ✓ corrosion - resistant, robust, up to 400°C

The salient design feature of the MCA and MDA series is an integral transmission gear for the amplification of the manual actuation torque. With this, the user has a sturdy and flexible clamping element which allows for high clamping forces with simple manual operation and maximum operational safety.

The MCA series is designed with bottomed thread and centered hexagon, the MDA Series with a through hole and sidewise arranged hexagon design. The power clamping nut can be used for various clamping tasks throughout the machine tool industry, particularly for clamping in presses and punches.


## Function and handling:

After manually tightening the clamping nut up to the surface, the drive pinion is activated through a right-hand turn of the actuation hexagon SW 1 or SW 2. The gearbox ratio tightens the torque with a high multiplier and the rotation of the threaded nut produces the clamping stroke of the threaded tension bolt. The clamping force is built up depending on the actuation torque.

Self-locking is guaranteed in every clamping position. To reliably ensure the necessary clamping force on one hand and to protect the clamping mechanism from damage caused by excessive actuation torques on the other, the use of a torque wrench is recommended.

In certain circumstances, clamping with the help of normal box spanners, angle wrenches and ratchet spanners may be acceptable while the use of impact wrenches is not. Make sure that the threaded-down stud bolts are fixed; i.e., that they cannot be turned.

The power clamping nuts are maintenance-free under normal operating conditions. The tempered steel housing and threaded nut are corrosion-resistant through surface-nitriding.

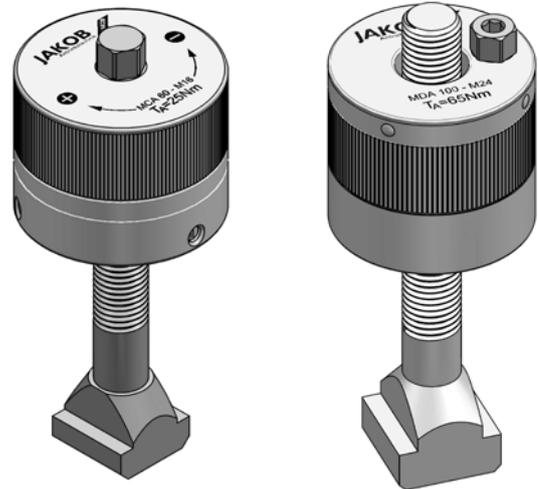


## Available options:

- ✓ high temperature version up to  $T = 400^{\circ}\text{C}$  (e.g. forging presses)
- ✓ corrosion-resistant version for demanding ambient conditions
- ✓ with additional latch mechanism for automatic switch over to power clamping mode for fast feeding or in a lowered layout (standard in types MCA 60, MCA-T, MCA-S)
- ✓ lubrication with food grease for the food industry, laboratory area, etc.
- ✓ with additional nipple for relubrication
- ✓ torque wrench or operation tools upon request


## Application example:

MCA-power clamping nut for clamping of upper and lower die in a hydraulic press.

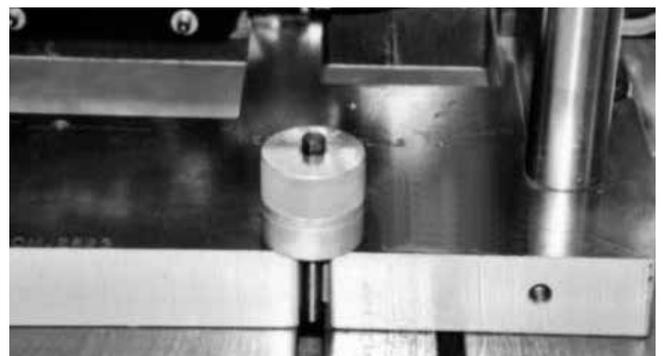


# Mechanical Power Clamping Nut I Series MCA-S/MCA-T

/// simple & manual operation with handle // fast infeed motion due to automatic changeover

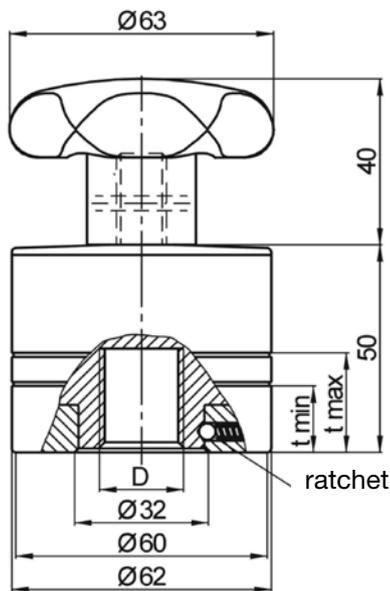

clamping nut MCA-S  
with star handle

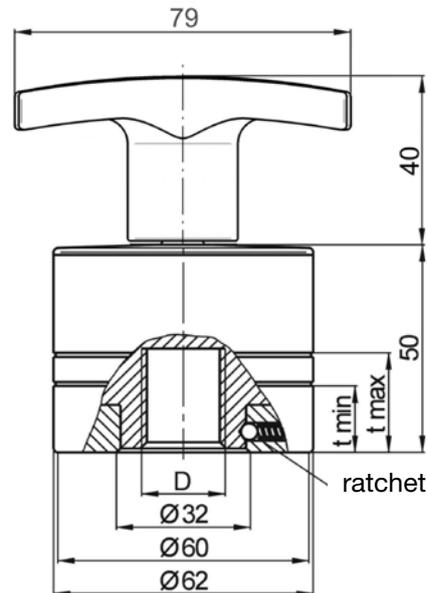


clamping nut MCA-T  
with T-handle

*material:*  
heat treated steel - nitro carburized  
cover plate: high tensile aluminum

Technical data and dimensions [mm]:  
length dimensions according to DIN ISO 2768 mH

Series	nominal clamping force [kN]	thread	max static load [kN]	screw in depth [mm]		weight approx. [kg]
				t <sub>min</sub>	t <sub>max</sub>	
MCA-S	40	M 10	50	16	24	1,0
		M 12	70			
MCA-T	40	M 16	120	16	24	1,0
		M 20	120			

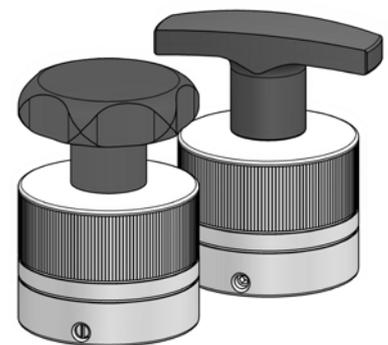

## Note:

Property class of threaded bolt should be at least Q10.9. Sizes of thread larger than M 16 should use a property class of Q 12.9, or the max. static load must be reduced. For optical control of actual screw-in depth of the T-bolt, two grooves are cut into the housing circumference matching t<sub>min</sub> and t<sub>max</sub>. When laying out the actual screw-in depth of the threaded bolt, the necessary stroke must be considered i. e. the max. specified screw-in depth must be reduced by at least the amount of the stroke.

## Application example:


MCA-T-clamping nut for adjustment of test bench sliding table



Ordering example: MCA-S - M 16 / MCA-T - M 20

# Mechanical Power Clamping Nut I Series MCA

with bottomed thread / thread protected / centered operation / compact design

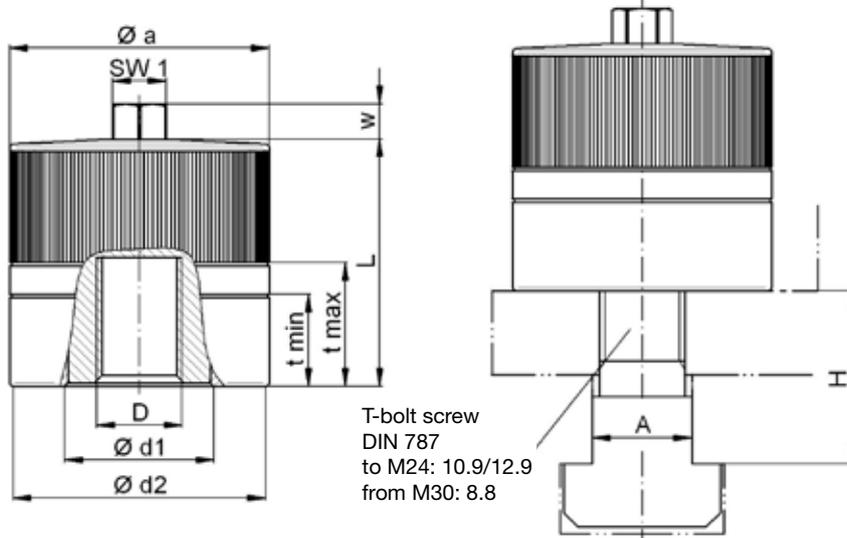

T-bolt screw  
DIN 787  
to M24: 10.9/12.9  
from M30: 8.8

material:  
heat treated steel - nitro carburized  
cover plate: high tensile aluminum

Technical data and dimensions [mm]: length dimensions according to DIN ISO 2768 mH

MCA Size	nominal clamping force [kN]	thread D* (6G)	nominal actuation torque [Nm]	max. static load [kN]	T-bolt A	weight approx. [kg]	Øa	Ød1	Ød2	L	screw-in depth t		SW 1	w
											min	max		
60	60	M 12	20	70	14	0,9	62	32	60	50	16	24	13	10
		M 16	25	120	18									
		M 20	30	120	22									
100	100	M 16	35	130	18	1,8	73	42	71	70	25	35	15	10
		M 20	40	200	22									
		M 24	45	200	28									
		M 30	50	200	36									
150	150	M 24	60	300	28	2,5	83	52	81	75	30	40	17	12
		M 30	70	300	36									
		M 36	75	300	42									
		M 42	80	300	48									
200	200	M 36	90	400	42	4,9	120	82	118	80	35	45	19	12
		M 42	95	450	48									
		M 48	100	450	54									
		M 56	105	500	-									
		M 64	115	500	-									

\*property class of threaded bolt up to M 24 min. Q 10.9; from M 30 Q 8.8 (further thread sizes i.e. inches on request)  
standard thread tolerance "6G"

## Note:


- For optical control of actual screw-in depth of the T-bolt, two grooves have been provided on the housing circumference matching  $t_{min}$  and  $t_{max}$ . When laying out the actual screw-in depth of the threaded bolt, the necessary stroke must be considered, i. e. the max. specified screw-in depth must be reduced at least by the amount of the stroke.
- The clamping forces mentioned in the data sheet can be influenced substantially by various operational parameters, such as thread length, surface quality of thread or thread lubrication.
- Maximum temperature range:  $-30^{\circ}\text{C}$  to  $+200^{\circ}\text{C}$  (optional up to  $+400^{\circ}\text{C}$ )

Ordering example: clamping nut MCA 100 - M 24  
incl. T-bolt screw MCA 150 - M 30 - 100 - 36

series and size \_\_\_\_\_  
thread size (T-bolt screw thread according to DIN 787) \_\_\_\_\_  
clamping height (H = 100 mm) \_\_\_\_\_  
size of T-bolt screw (A = 36 mm) \_\_\_\_\_

# Mechanical Power Clamping Nut I Series MDA

with through hole thread for variable clamping edges unlimited clamping stroke

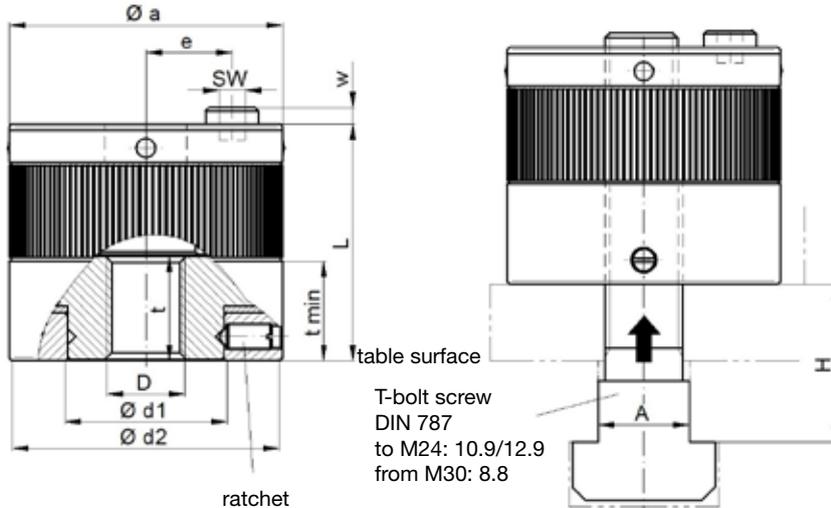

material:  
heat treated steel - nitro carburized

MDA Size	nominal clamping force [kN]	thread D* (6G)	nominal actuation torque [Nm]	max. static load [kN]	T-bolt A	weight approx. [kg]	Øa	Ød1	Ød2	e	L	t	SW**	w
60	60	M 12	30	70	14	1,6	74	40	72	21,5	58	23	8	5
		M 16	35	120	18	1,6								
		M 20	40	120	22	1,6								
120	120	M 16	65	130	18	2,6	84	50	82	26,5	73,5	32	8	5
		M 20	70	200	22	2,6								
		M 24	75	240	28	2,5								
		M 30	80	240	36	2,4								
180	180	M 24	90	300	28	4,0	105	64	103	35	78	37	8	5
		M 30	100	300	36	3,9								
		M 36	110	400	42	3,8								
		M 42	115	450	48	3,7								
		M 48	125	450	54	3,7								

\*property class of threaded bolt up to M 24 min. Q 10.9; from M 30 Q 8.8 (further thread sizes i.e. inches on request)  
standard thread tolerance "6G" / \*\* optional Torx T50

## Note:

- For optical control of actual screw-in depth of the T-bolt, two grooves have been provided on the housing circumference matching  $t_{min}$  and  $t_{max}$ . When laying out the actual screw-in depth of the threaded bolt, the necessary stroke must be considered, i. e. the max. specified screw-in depth must be reduced at least by the amount of the stroke.
- The clamping forces mentioned in the data sheet can be influenced substantially by various operational parameters, such as thread length, surface quality of thread or thread lubrication.
- Maximum temperature range: -30°C to +200°C (optional up to +400°C)

Application example: Clamping nut MDA for clamping chain wheels during milling.



Ordering example: clamping nut MDA 120 - M 24  
incl. T-bolt MDA 180 - M 30 - 100 - 36

series and size \_\_\_\_\_  
thread size (T-bolt screw thread according to DIN 787) \_\_\_\_\_  
clamping height (H = 100 mm) \_\_\_\_\_  
size of T-bolt (A = 36 mm) \_\_\_\_\_



# Mechanical Power Clamping Nut I Series MCG

with threaded pin / function as power clamping screw / centered operation / compact design

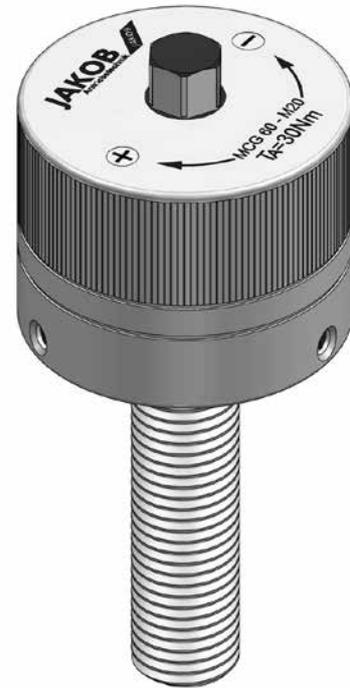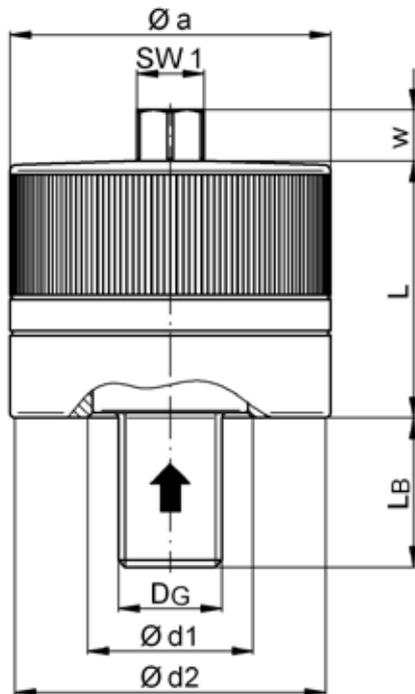

property class of threaded pin minimum 10.9

material:  
stainless steel - nitrated

Technical data and dimensions [mm]: length dimensions according to DIN ISO 2768 mH

MCG Size	nominal clamping force [kN]	thread DG*	nominal actuation torque [Nm]	max. static load [kN]	weight approx. [kg]	Øa	Ød1	Ød2	L	SW 1	w
60	60	M 12	20	70	1	62	32	60	50	13	10
		M 16	25	120							
		M 20	30	120							
100	100	M 16	35	130	2	73	42	71	70	15	10
		M 20	40	200							
		M 24	45	200							
150	150	M 30	50	200	3	83	52	81	75	17	12
		M 24	60	300							
		M 30	70	300							
200	200	M 36	75	300	6	120	82	118	80	19	12
		M 42	80	300							
		M 36	120	400							
		M 42	125	450							
		M 48	130	450							
		M 56	140	500							
		M 64	150	500							

length of threaded pin  $L_G$  = variable (according to customer information)

\*further thread sizes i. e. inches on request

max. allowed temperature range: -30°C up to +200°C

Ordering example:

clamping nut

MCG 100 - M 24 -  $L_B=120$

series and size (max. clamping force = 100 kN)


thread size

thread length


# Hydromechanical Power Clamping Nut | General

JAKOB hydromechanical power clamping nuts of the HM series are designed for maximum clamping forces and to address the highest demands concerning reliability, operating comfort and product quality. The innovative multi-piston system offers many advantages compared to conventional ring hub designs.

The user can choose from several standard models along with customized versions. JAKOB clamping nuts can solve many clamping problems in all industries, including machine building, the steel industry, refineries, in chemical plants, power plants, and off-shore installations.

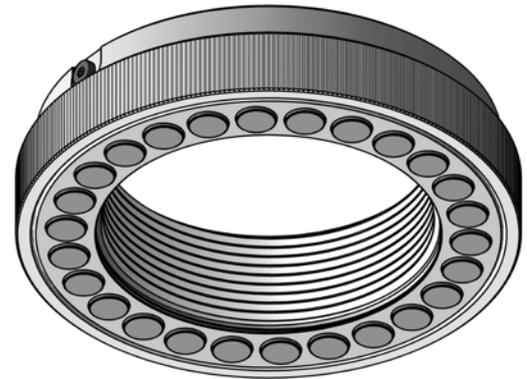

## Functional principle of multi-piston system:

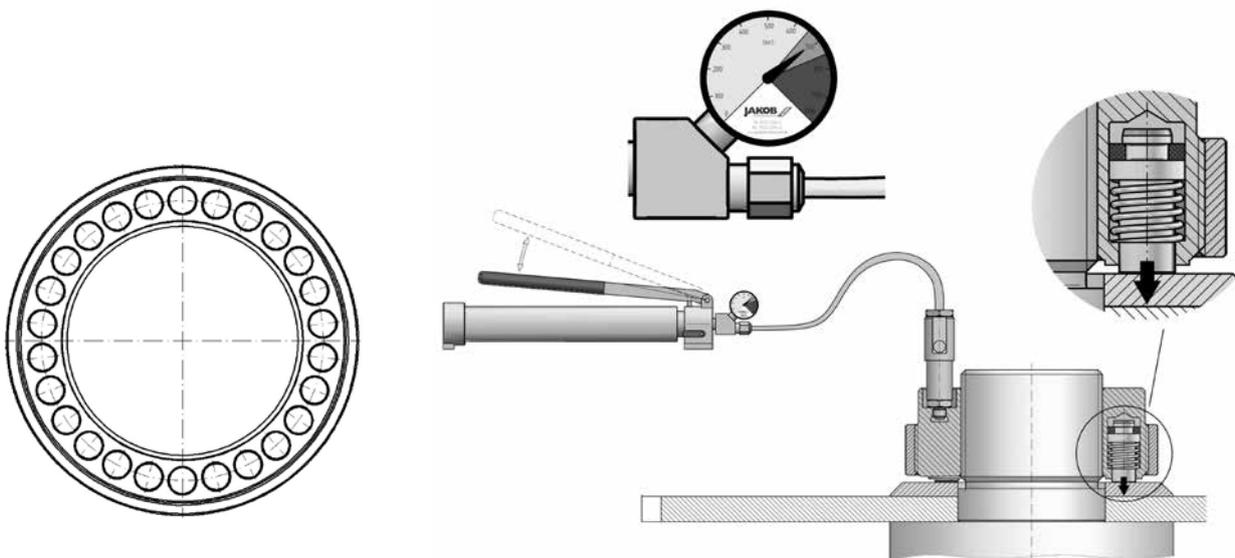

The JAKOB multi-piston system is a genuine innovation in the hydraulic clamping sector. The main design feature is a ring-shaped cylinder housing with internal threads. Several small thrust pistons are arranged concentrically on its base. The individual piston bores are connected hydraulically using a special tangential recess. A patent has been registered for this principle.

The pressurisation is carried out either via a high-pressure connection or a quick-action coupling using a hand-foot operated pump or a hydraulic unit, or as an independent system by threading down a pressure screw. The piston seals guarantee a permanent leakproof design without pressure drops up to 1,500 bar even during long-term op-

eration. Maximum reliability can be achieved with an additional counter or blocking ring. Using return springs, when each individual piston is released, it rotates back into the initial position and the hydraulic oil is returned to the pump without leaking.

The ring nut in robust cage design guarantees the greatest stiffness and minimum material expansion, even under maximum pressure loads. The multi-piston system always permits design in any geometric form, whether as a ring segment or as a rectangular block housing. That means even highly unusual clamping problems can be solved.

# Hydromechanical Power Clamping Nut I General

## Special characteristics:

- ✓ highest clamping forces ✓ large operating stroke
- ✓ simple & manual operation with clamping force control
- ✓ maximum reliability with counter ring
- ✓ no torsional or lateral forces by clamping
- ✓ compensation of uneven surfaces
- ✓ spring return of pistons ✓ leakproof oil refeed
- ✓ compact – robust – corrosion-resistant


series	HMG 	HMP 	HMP-HD 
clamping force	high	high	very high
nominal pressure	10150 PSI (700 bar)	10150 PSI (700 bar)	17400 PSI (1200 bar)
operating stroke	1-2 mm	max. 8 mm	max. 8 mm
operating mode	<ul style="list-style-type: none"> <li>• manual</li> <li>• actuation by hexagon key</li> </ul>	<ul style="list-style-type: none"> <li>• manual / automatic</li> <li>• hand-foot-pump</li> <li>• aggregate</li> </ul>	<ul style="list-style-type: none"> <li>• manual / automatic</li> <li>• hand-foot-pump</li> <li>• aggregate</li> </ul>
hydraulic connection	self-contained	G1/8 - hydraulic trip coupling optional screwed joint	G1/4 -hydraulic trip coupling
clamping force- or pressure control	indicator	pressure gauge	pressure gauge
counter-ring	optional	optional	required
dimension	very compact	very compact	compact

### Note:


The power clamping nuts of the HMP and HMP-HD series are equipped with a radial and axial hydraulic connection plus a high-pressure connection nipple and a plug screw. The corresponding hydraulic couplings, high-pressure hoses with variable lengths, hand-foot operated pumps or electric pumps and fittings are available on request.

# Hydromechanical Power Clamping Nut I Series HMG


- /// multi-piston system for high clamping forces
- /// self-contained system without access line for simple, manual clamping
- /// clamping force control via pressure gauge or index-spring return of hubs
- /// optionally with counter ring (mechanical safety) for maximum reliability

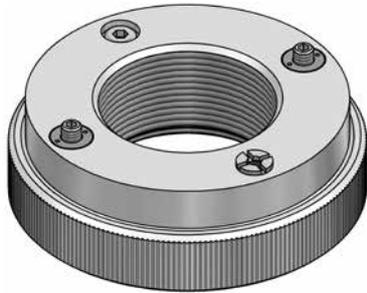


material:  
heat treated steel - nitro carburized

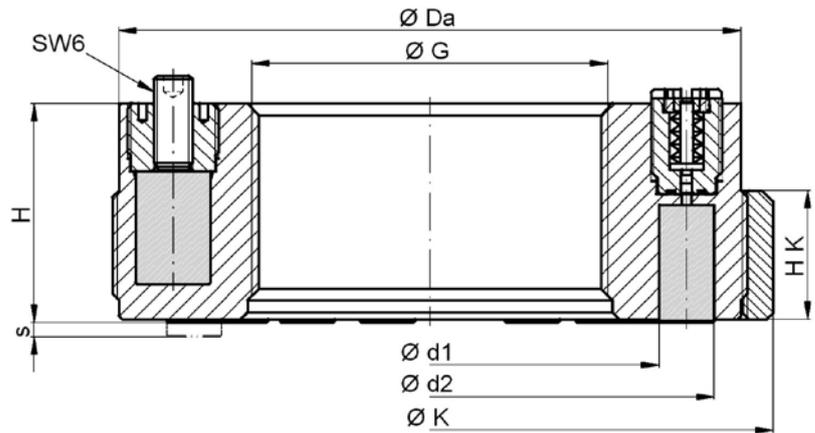

## Pressure index:



normal position  
- pressure-less



maximum position at  
nominal pressure - 700 bar

Technical data and dimensions [mm]: length dimensions according to DIN ISO 2768 mH

HMG Size	clamping force* (PN=700bar) [kN]	thread ØGmax	operating travel s max	Ø Da**	H	Ø d1	Ø d2	Ø K	HK	mass*** approx. [kg]
36	200	36	1,7	100	65	52	86	120	40	3,3
48	230	48	1,5	112	65	63	97	135	40	3,9
60	260	60	1,3	125	67	75	109	144	40	4,5
80	345	80	1,0	146	67	96	130	166	40	6
100	375	100	1,8	167	70	116	150	188	40	7
125	460	125	1,5	192	70	141	175	212	40	8,5
150	520	150	1,3	217	70	160	200	238	40	9,5
175	635	175	1,0	242	70	191	225	262	40	11
200	695	200	1,0	267	70	216	250	288	40	13,5

\*maximum permissible operating pressure 800 bar  
\*\*external diameter – nut housing without counter ring  
\*\*\*weight specification for ØGmax – without counter ring

## Note:


- /// standard size from 36 to 80 with one adjusting screw - size 100 to 200 with two adjusting screws
- /// the actuation torque (SW 6) for maximum clamping force is approx. 35 Nm

Ordering example: hydromechanical power clamping nut      HMG 36      -      M30  
    HMG 200      -      K      -      TR200 x 5


size \_\_\_\_\_  
 optionally with counter ring \_\_\_\_\_  
 thread size \_\_\_\_\_

# Hydromechanical Power Clamping Nut I Series HMP

- /// multi-piston system for high clamping forces
- /// leak-proof oil refeed into pump and spring return of cylinders
- /// high-pressure adapter (axial/radial) for hand- or foot-pump up to 700 bar
- /// optionally with counter ring (mechanical safety) for maximum reliability

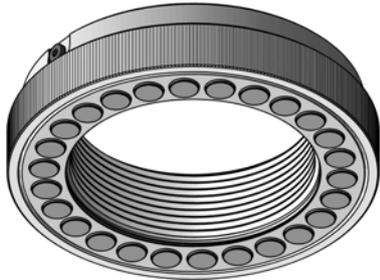

material:  
heat treated steel - nitro carburized

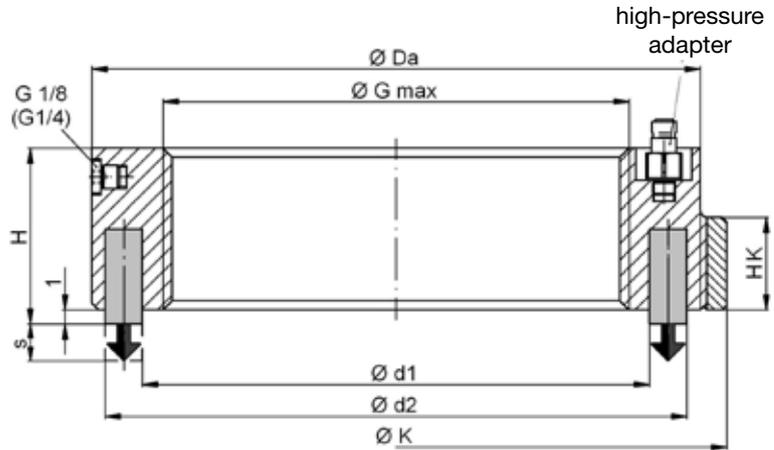

Technical data and dimensions [mm]: length dimensions according to DIN ISO 2768 mH

HMP Size	clamping force* (PN=700 bar)	thread ØGmax	operating travel s max	Ø Da	H	Ø d1	Ø d2	Ø K	HK	mass** approx. [kg]
48	290 [kN]	48	8	115	65	66	100	135	40	4,0
60	320 [kN]	60	8	125	65	75	109	144	40	4,5
80	370 [kN]	80	8	146	65	96	130	166	40	6
100	460 [kN]	100	8	167	65	116	150	188	40	7
125	550 [kN]	125	8	192	65	141	175	212	40	8,5
150	640 [kN]	150	8	217	65	160	200	238	40	9,5
175	720 [kN]	175	8	242	65	191	225	262	40	11
200	810 [kN]	200	8	267	70	216	250	288	40	13,5
225	900 [kN]	225	8	292	70	241	275	314	40	15
250	1250 [kN]	250	8	332	75	269	313	353	45	22
275	1380 [kN]	275	8	358	75	294	338	383	45	24
300	1460 [kN]	300	8	382	75	319	363	403	45	26
350	1680 [kN]	350	8	432	75	369	413	454	45	29
400	1900 [kN]	400	8	482	75	419	463	504	45	33

\*maximum permissible operating pressure Pmax = 1000 bar

\*\*declaration of weight for Gmax – without counter ring

## Operating instructions:


The HMP series, by default, has a connection nipple for a user-friendly snap coupling. For longer clamping periods we recommend the usage of a counter ring ("K"). Optionally, a special high-pressure screw-on coupler can be used - this connection nipple features a check valve, the coupler has a lever switch. This allows coupling and decoupling even at maximum hydraulic pressure. The pressurization is maintained throughout the entire clamping process. An additional counter ring maximizes operational safety.

Ordering example: hydromechanical power clamping nut HMP 100 - M82 x 2 - a  
HMP 250 - K - TR250 x 5 - a


size \_\_\_\_\_  
 optionally with counter ring \_\_\_\_\_  
 thread size \_\_\_\_\_  
 position of high-pressure adapter \_\_\_\_\_  
 standard version a – axial (optionally s – sidewise or a/s)

# Hydromechanical Power Clamping Nut I Series HMP-HD

- /// multi-piston system “heavy duty” - design for highest clamping forces
- /// leak-proof oil refeed into pump and spring return of hubs
- /// quick-action coupling (axial/radial) for hand- or foot-pump up to 1500 bar
- /// with counter ring (mechanical safety) for maximum reliability

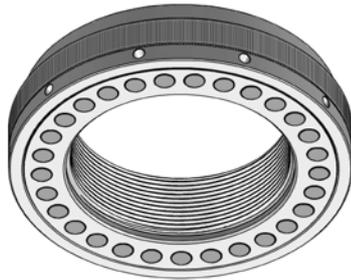

material:  
heat treated steel - nitro carburized

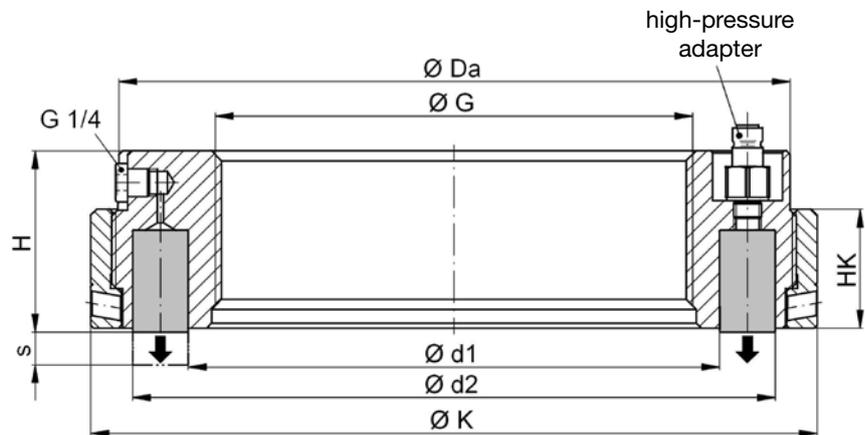

Technical data and dimensions [mm]: length dimensions according to DIN ISO 2768 mH

HMP-HD Size	clamping force* (PN=1200bar)	thread ØG max	operating travel s max	Ø Da	H	Ø d1	Ø d2	Ø K	HK	mass** approx. [kg]
60	735 [kN]	60	8	143	90	80	124	168	60	7
80	885 [kN]	80	8	163	90	100	144	190	60	9
100	1030 [kN]	100	8	185	90	121	164	212	60	10,5
125	1180 [kN]	125	8	208	90	145	188	235	60	13
150	1400 [kN]	150	8	236	90	171	215	263	60	14,5
175	1550 [kN]	175	8	257	90	194	238	285	60	17
200	1770 [kN]	200	8	286	90	221	265	314	60	21
225	1920 [kN]	225	8	309	90	245	289	338	60	23
250	2140 [kN]	250	8	338	90	272	316	365	60	34
275	2290 [kN]	275	8	362	100	297	340	390	65	37
300	2510 [kN]	300	8	388	100	323	367	416	65	40
350	2880 [kN]	350	8	438	100	373	417	467	65	44
400	3250 [kN]	400	8	490	100	424	468	518	65	50

\*maximum permissible operating pressure Pmax = 1,500 bar

\*\*weight with Ø Gmax


## Operating instructions:

For the clamping process, the HMP-HD series is equipped with a user-friendly quick-action coupling. After pressure build-up and securing with the counter ring, the hydraulic pressure is released. For clamping operation, the coupling and cable are separated. For the release process, the hydraulic connection is re-coupled, the pressure is applied, the counter ring and the pressure are released.

Ordering example: hydromechanical power clamping nut HMP-HD 250 - TR 250 x 5 - a

size \_\_\_\_\_  
 thread size \_\_\_\_\_  
 position of hydraulic clutch \_\_\_\_\_  
 standard version a – axial (optional s – sidewise or a/s)

## Hydromechanical Preload Device I HVV-R Series Radial Operation - from sides

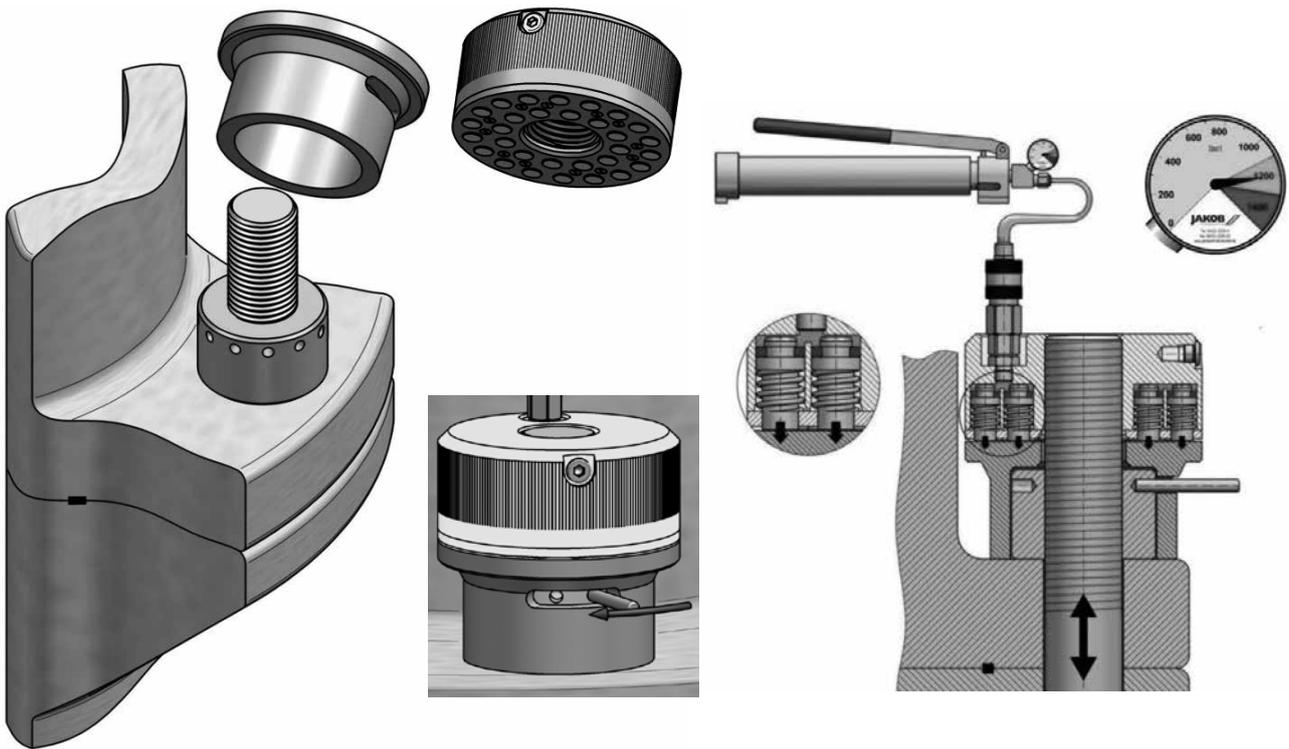

## Hydromechanical Preload Device I HVV-A Series Axial Operation - from above



# Power Clamping Screws



# Mechanical Power Clamping Screw I Series SC

- /// wedge mechanism as force amplifier
- /// high clamping forces
- /// maximum operational safety
- /// low actuation torque
- /// simple & manual operation

The power clamping screws of the SC series are equipped with a wedge system as force amplifier. This innovative system allows for highest clamping forces with low actuation torques and simple manual operation. The robust design of all parts, the self-locking mechanism as well as a high overload capability guarantee maximum operational safety. The clamping screws of the SC series have various application possibilities, mainly in presses, punches and machine tools, as well as in jigs, fixtures and similar devices.

## Function:

The wedge clamping system of the SC clamping screw is self-locking in each clamping position due to its geometry, and offers a clamping stroke of up to 3 mm. This way, depending on the actuation torque, very high clamping forces up to the nominal clamping force can be achieved.




## Clamping procedure:

The infeed of the clamping screw down to a solid contact with the part to be clamped (7) is the first step, done by manually turning the housing (1) clockwise. Only then, the hexagon of the actuation spindle (2) should be turned clockwise, thus moving the forced-in key (3) in axial direction and pressing the wedge parts (4) in radial direction. The latter motion results in the axial stroke of the thrust piece (5) against the workpiece (7). The clamping force is led over the wedge bearing (6) through the housing (1) into the clamping device (8).

After approximately two turns of the actuation hexagon the travel of the thrust piece will be blocked by an internal fixed stop and the torque wrench will disengage although the required clamping force has not been generated; the clamping operation has to be repeated. The clamping stroke state is indicated by the operating path "s". The maximum clamping position is reached when the lower cylindrical portion of the actuation hexagon is even with the top of the housing (Fig. A2).

## Release:

The release procedure is carried out in reverse order. By turning the operating hexagon to the left up to the fixed back stop (Fig. A1), the wedge slide moves back and the clamping mechanism is released. Coil springs push the pressure piece and the wedges back into the starting position.

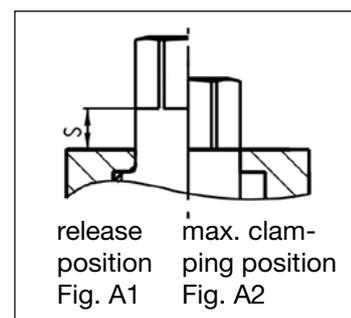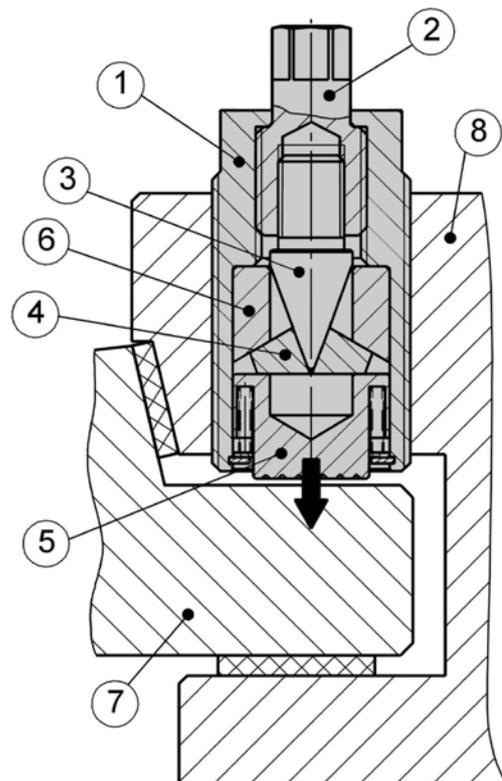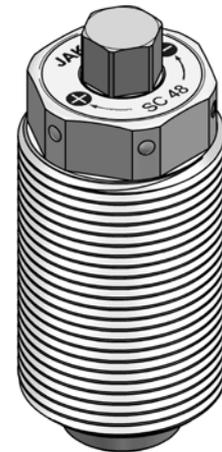

# Mechanical Power Clamping Screw I Series SC

Technical data and dimensions [mm]: length dimensions according to DIN ISO 2768 mH

SC Size	nominal clamping force [kN]	max. actuation torque [Nm]	max. clamping stroke [mm]	max. static load [kN]	operating path s [mm]	mass approx. [kg]	thread D*	Ø d	L1	L	SW 1	SW 2
36	40	30	1,5	80	5	0,5	M 36 x 3	19	62	73	13	30
48	80	70	2,2	160	7,5	1,1	M 48 x 3	28	75	90	17	41
64	140	120	2,5	240	8,5	2,5	M 64 x 4	39	90	110	19	55
80	180	140	2,5	320	8,5	5,3	M 80 x 4	39	100	160	19	65
100	250	130	3	400	17	12	TR 100 x 6	60	205	230	14**	65

\*further sizes and threads (inch thread) available on request

\*\*hexagon socket - operating pin length: s = 17 mm

allowed temperature range: -40°C up to +250°C



## Note:

- to ensure the required clamping force is achieved and to protect the internal mechanism from damage, we recommend the use of a torque wrench for applying the actuation torque. Under certain conditions, clamping is also acceptable with a standard wrench or socket wrench.
- the clamping screws are lubricated for life and maintenance free under normal operating conditions. A high temperature version of up to 400°C is possible.

### material:

heat treated steel - nitro carburized

### Application example: slide-in-clamp

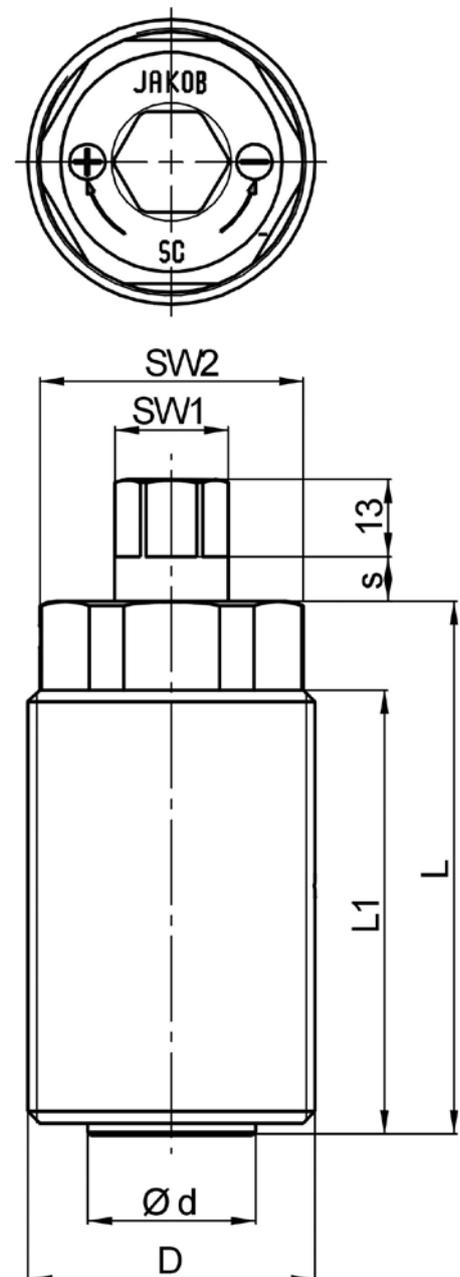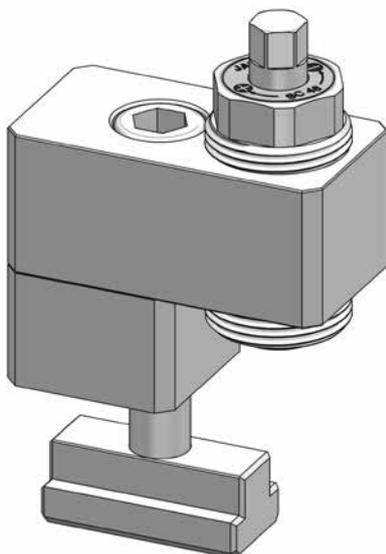


## Power Clamping Screws I Series MSP/MSPD-HSP

For face plates and surface plates on jaw boxes as well as grinding and turning machines and special machines

JAKOB power clamping screws have been developed for the highest demands and maximum workpiece weights with optimum operational safety. They are primarily suited for integration in jaw boxes or for direct installation in face plates of lathes, grinding and special machines. Diverse clamping screw series with different constructions and profile requirements are available. The user can choose between hydraulic or mechanical, and single or double actuating designs.

All parts are made of heat-treated steel and produced with high precision. This guarantees a clamping element with highest sturdiness and reliability.

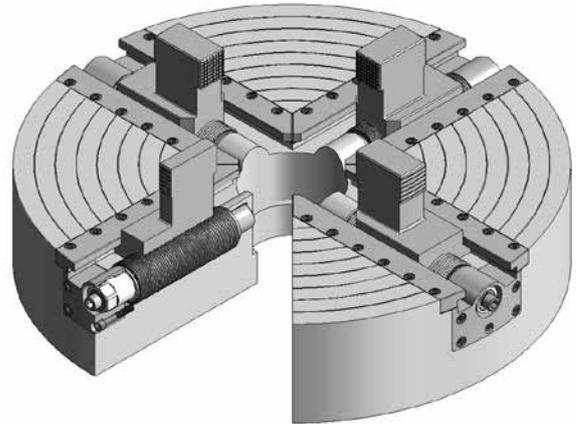


### Essential features of performance:

- /// enormous clamping force // low actuation torque
- /// maximum reliability // high stiffness
- /// large clamping stroke // high alignment accuracy
- /// simple & manual operation
- /// minimum maintenance

### Application examples:



Face plate for turning center with 8 power clamping screws type MSP 200 for clamping of turbine rotors up to 350 metric tons total weight

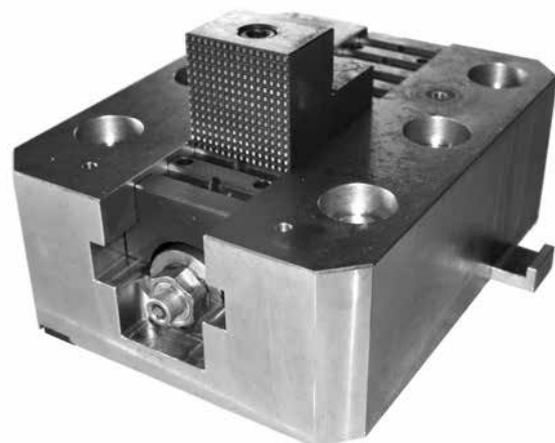

Double actuating power clamping screw series MSPD 80 for clamping direction internal and external integrated in jaw box

# Power Clamping Screws I Series MSP/MSPD-HSP

## Mechanical Power Clamping Screw Series MSP / MSPD

The force transmission in the mechanical power clamping screws is generated by a special mechanical key clamping system. The sophisticated geometry of the key mechanics have very large transmission surfaces and a self-locking mechanism to ensure low wear and the highest reliability. Especially worth mentioning is the double-acting version, series MSPD, with a simple automatic reverser to change clamping direction from external to internal clamping. Furthermore, its simple, manual operation and low installation cost are relevant. When taking the main technical and economic assessment criteria into consideration, the MSP/MSPD series can be recommended as the ideal version for most applications.

## Hydromechanical Power Clamping Screw Series HSP

The hydromechanical power clamping screw's operating principle is based on power amplification, resulting from the area ratio of a primary and secondary piston. In the distinctly smaller primary piston, an internal oil pressure of up to 600 bar is generated and at the same time a long stroke distance is travelled. The secondary piston, with its larger effective area with smaller clamping stroke produces an extremely large axial force, which is transmitted through the external thread to the piston housing on the clamping shoe. HSP power clamping screws are only provided for external clamping direction. They excel with their long clamping strokes and low actuation torques. However, due to the necessary, mechanical safeguard (counter ring), significantly higher expenses are to be expected.


### Note:

- ✓ during calculation of installation length L1 bearing rings or axial washers must be taken into account
- ✓ basically, except the fitting position L1, the thread of the screw housing or the dimensions of the bearing pin can be customised to fit customer needs. That might be necessary, especially when replacing defective older model clamping screws and when retrofitting machine tools. Please get in touch with us if you have variances from standard dimensions.
- ✓ clamping force monitoring can be integrated using our additionally available Force Monitoring System (FMS). See page 22 for more information
- ✓ operating tools available upon request


## Clamping Force Diagram

Each clamping screw is supplied with a clamping force diagram and a test report.

On request, the appropriate clamping force diagram can be supplied on an aluminum plate for fitting to the machine, as available information for the operating personnel. Due to friction loss in the clamping jaws or linear guides, the table or diagram values for the actuation torque must be corrected. The appropriate factor must be determined, if necessary, by the face plate or jaw box manufacturers either empirically or based on trials and tests.



Clamping force diagram "MSPD 120"

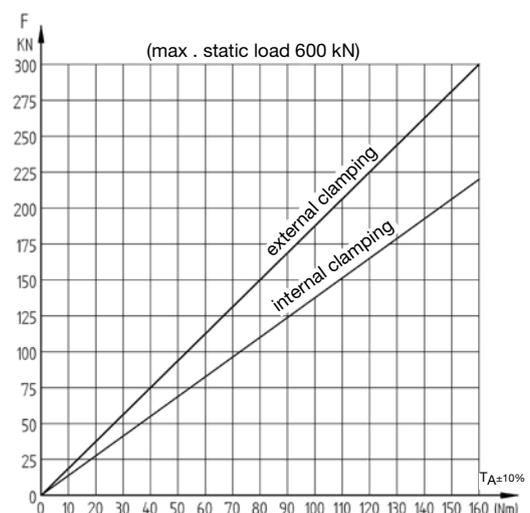


# Mechanical Power Clamping Screws I Series MSP/MSPD

## Design and function

The single acting Mechanical Power Clamping Screws of the MSP series have been developed for external clamping only, whereas the double acting ones of the MSPD series are designed for external (shafts, rollers) as well as internal clamping (pipes, bushes). These mechanical power clamping screws are equipped with a wedge mechanic system as force amplifier. The double acting version is equipped with an automatic mechanism to change clamping direction. This system generates high clamping forces with a simple operating procedure requiring low manual actuation torque. The state of the art wedge mechanic system is extremely robust and self-locking in every clamping stage. The high stiffness achieved thus also increases operational safety. No additional mechanical safety devices or supports are required for supporting the threaded power clamping screws.

The force amplification mechanic is activated through rotation of the drive spindle, which presses the threaded spindle and jaw against the workpiece. Clamping force is generated according to actuation torque. By changing the load direction from "external" to "internal"; the clamping direction within the force magnifier automatically changes without the need to undertake an additional reversal of the clamping direction by hand. Correspondingly, the clamping forces are passed on further; depending on the direction of clamping into the left bearing journal (LH) during external clamping, or in the right bearing journal (RH) during internal clamping. The reverse motion of the force amplifier and threaded power clamping screw is compensated by a compression spring which also functions as a return spring during unclamping.

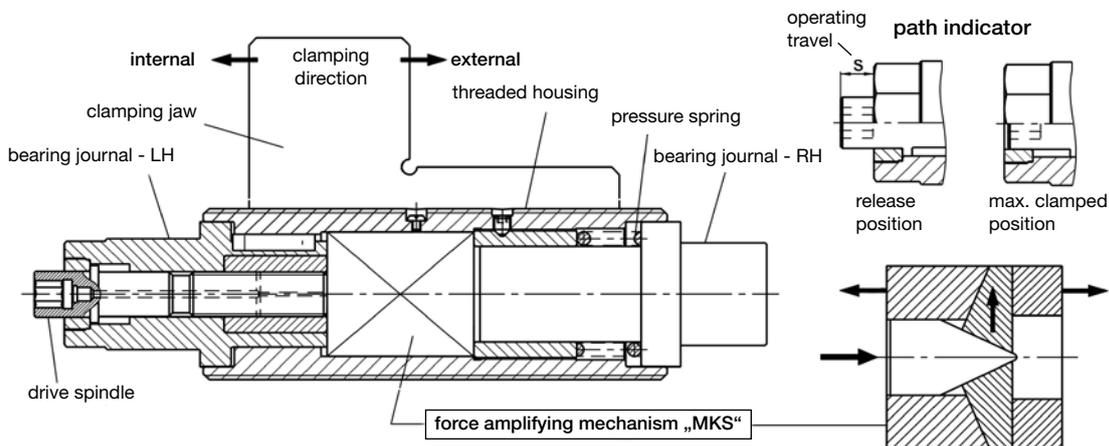

## Operation:

### External clamping

The clamping jaw is prealigned and pretensioned by turning the external hexagon SW1 clockwise. A torque wrench should be used for force clamping and fine adjustment. By turning the internal hexagon SW2 clockwise, the drive spindle's force amplification is activated and clamping force is generated proportionally to the actuation torque until the torque wrench disengages upon reaching the preselected torque (see clamping force diagram). The clamping stroke can be controlled via an operating path indicator. The clamping procedure has to be repeated by loosening SW2 and pretensioning SW1 if the preselected starting torque has not been reached at the end of the operating path. Avoid exceeding the maximum actuating torque as it may cause damage.

### Internal clamping

The clamping jaw approaches the workpiece, is prealigned and pretensioned by turning the external hexagon SW1 counter-clockwise. This automatically changes the clamping direction to internal clamping. For this changeover the threaded housing of the power clamping screw with the jaw is maintained in a preloaded state and then subjected to an axial motion in reverse direction, i.e. the external hexagon SW1 should be turned by approx. one turn extra. The power clamping with internal hexagon SW2 is then done in a similar manner as the external clamping procedure.


### Release

Release is effected in reverse order by turning the internal hexagon SW2 counter-clockwise until the fixed stop. The drive spindle is reversed and the clamping system unclamped. The return spring pushes the threaded spindle with clamping jaw back, the force amplifier returns to its initial position.

# Mechanical Power Clamping Screws | Series MSP/MSPD

Series MSP - Mechanical Power Clamping Screw for clamping direction “ external ”

Series MSPD - Mechanical Power Clamping Screw for clamping directions “ internal and external ”

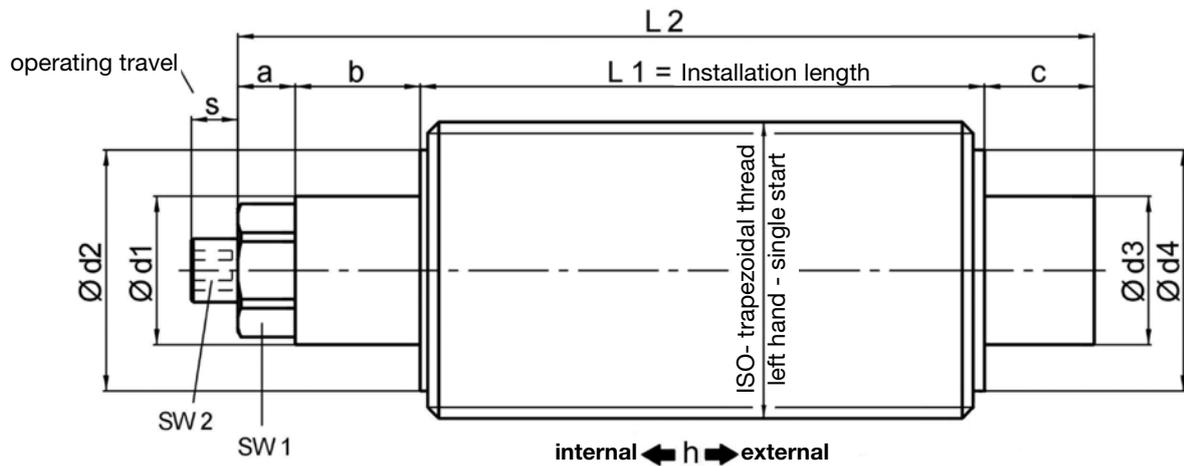

material:  
heat treated steel - nitro carburized


Technical data and dimensions [mm]: length dimensions according to DIN ISO 2768 mH

MSP/MSPD	Size	50	65	80	100	120	160	200
ISO-trapezoidal thread	TR-left	50x3	65x4	80x5	100x6	120x6	160x8	200x10
nominal clamping force [kN]	external	100	150	200	250	300	400	500
	internal	70	100	140	180	220	300	400
nominal actuation torque [Nm]		60	80	100	130	160	160	180
max. static load [kN]		150	250	300	400	600	800	1200
stroke h [mm]		2	2,5	3	3	3	3	3
operating travel s [mm]		7,5	15	17	17	17	25	27
hexagon	external SW 1	27	41	46	50	55	65	85
	internal SW 2	10	12	14	14	17	17	17
a		20	20	20	25	25	30	40
b / c		30	35	40	50	60	70	80
Ø d1/d3 f7		30	45/40	50	60	65	80	100
Ø d2/d4		40	55/52	68	85	95	130	160
MSPD - L1 min.		150	170	230	250	280	330	360
MSPD - L2 min.		230	260	330	375	425	500	560
MSP - L1 min.		140	150	210	220	250	290	320
MSP - L2 min.		220	240	310	345	395	460	520

Note: // special thread sizes or customized dimensions are possible upon request  
// sizes 120 / 160 / 200 are also available with more powerful clamping force amplifier

Ordering example: MSPD 100 - TR 100 x 6 - LH - L1 = 300 mm

# Hydromechanical Power Clamping Screws I Series HSP

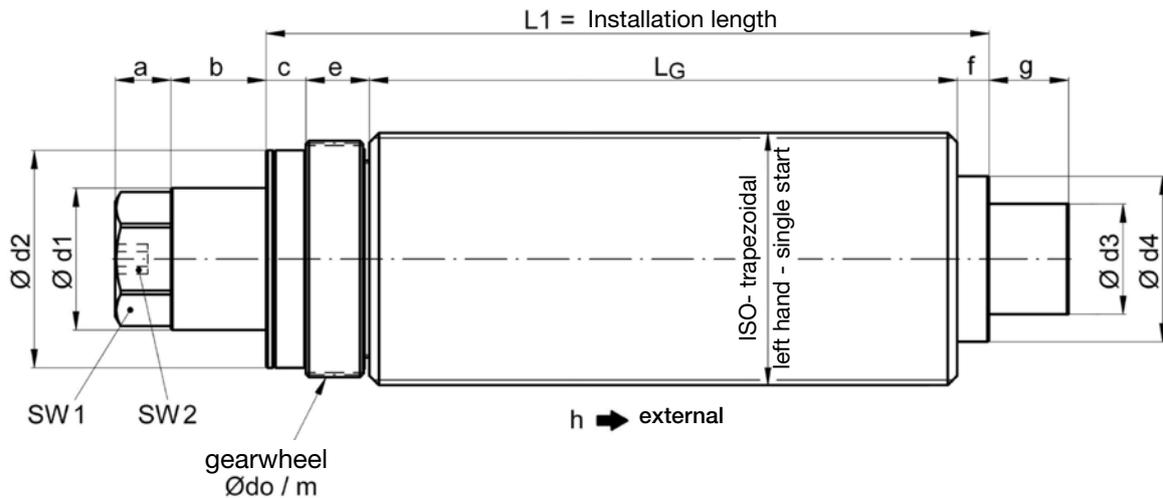

material:  
heat treated steel nitro carburized

Technical data and dimensions [mm]: length dimensions according to DIN ISO 2768 mH

HSP	size	80	100	120	160	200	220
ISO-trapezoidal thread	left	TR 80x5	TR 100x6	TR 120x6	TR 160x8	TR 200x10	TR220x10
nominal clamping force	[kN]	100	150	220	400	600	750
nominal actuation torque	[Nm]	60	70	80	150	150	140
max. static load	[kN]	200	300	400	700	1000	1200
stroke h	[mm]	3	3	5	6	6	8
operating path s	[mm]	16	19	-	-	-	-
hexagon	external SW 1	46	50	65	75	85	100
	internal SW 2	12	14	17	17	17	17
a		20	25	30	35	40	45
b		30	40	50	60	70	70
c		13	15	20	25	30	30
Ø do		71,5	90	108	146	184	201
module m		1,25	1,5	1,5	2	2	3
Ø d1 f7		50	60	75	90	100	120
Ø d2		68	85	100	140	165	180
Ø d3 f7		40	50	60	70	80	100
Ø d4		60	80	90	105	135	150
e		22	25	30	40	45	45
f		15	15	15	20	20	20
g		30	35	40	50	55	60
LG min.		140	145	215	230	300	455
L1 min.		190	200	280	315	395	550

- Note:
- /// after completion of the clamping procedure the clamping screw should be secured against overload by means of a mechanical safety device (counter gearwheel), which as well helps to achieve a high degree of stiffness
  - /// special thread sizes or customized dimensions as well as different toothing of counter gearwheel or series with higher clamping force are available on request
  - /// the pinion shaft (SW3) for driving the counter gearwheel is not supplied

Ordering example: HSP 100 - TR 100 x 6 - lh - L1 = 300 mm

# Force Monitoring




## FMS - Force Monitoring System

The holding force of a clamping device during mechanical tooling is of special importance. It is relevant for tooling quality, but also for the safety of the operator, the workpiece and the machine tool. Especially during the tooling of bigger components with multi-day clamping and numerous shift changes, the monitoring of clamping forces via constant data transfer is safety-relevant. All currently available monitoring systems, no matter whether dynamic or static, cannot capture readings of the actual clamping situation.

With the intelligent clamping jaw FMS from JAKOB the customer receives a reliable and easy-to-use monitoring system, that constantly transmits the current clamping forces of all jaws telemetrically. The readings can be transmitted to the included portable device, to a laptop, or directly to machine control.

If the clamping force during tooling sinks below a threshold set by the customer, a signal is generated immediately, which can be used for emergency shutdown by machine control.

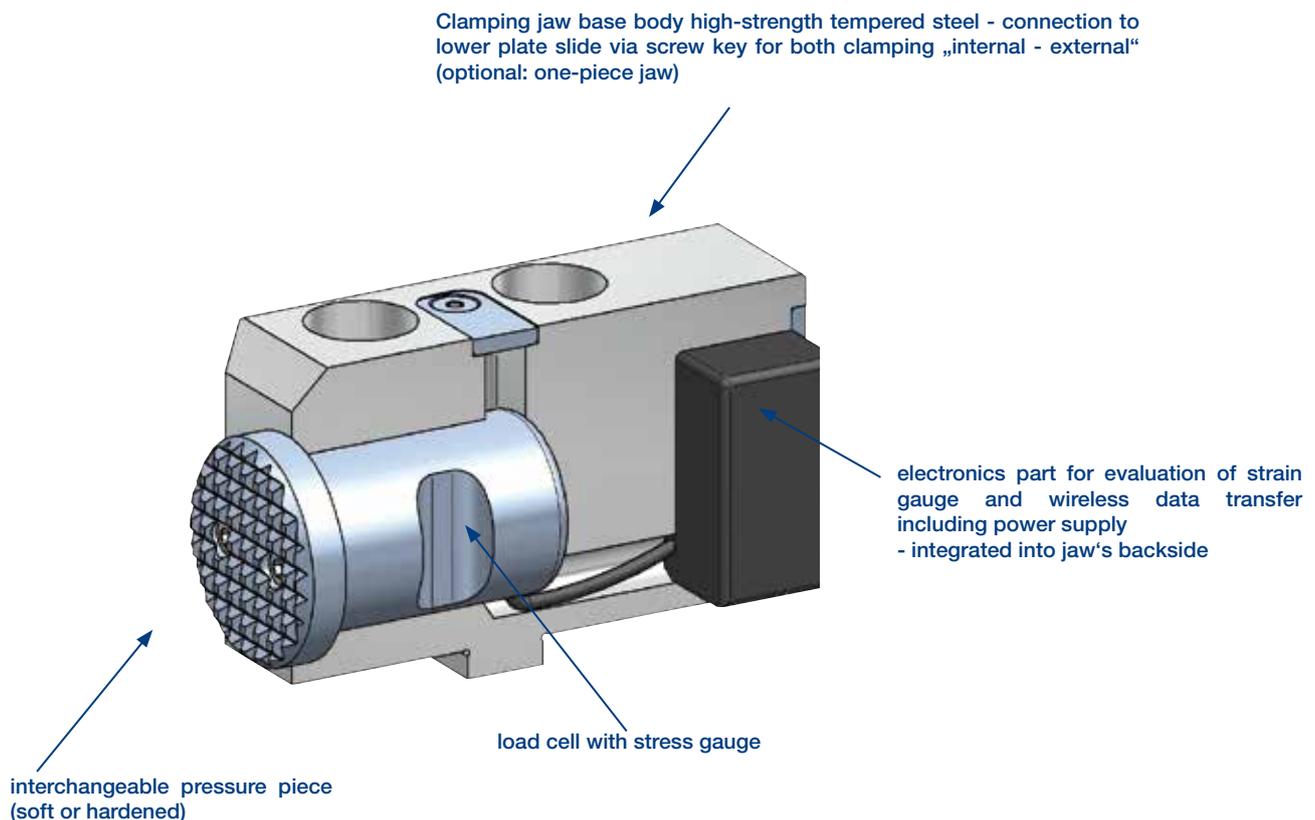

# FMS - Force Monitoring System

## Functions of the monitoring system:

- ✓ robust strain gauge load cell measures the clamping force with high accuracy
- ✓ clamping force readings are sent to an evaluation and sending unit
- ✓ readings are sent to the portable device, laptop, or machine control wirelessly (WLAN 2,4 GHz)
- ✓ the readings are evaluated and displayed on the portable device
- ✓ portable device runs on rechargeable battery which can be recharged using the docking station
- ✓ docking station can be provided with alarm output optionally
- ✓ clamping force according to power clamping screws specified to customers needs



laptop with USB reception stick





portable device with integrated antenna and display



auxiliary antenna for connection to machine control

# HMD - Hydraulic Force Measuring System

type-size	HMD 300-R	HMD 600-R
measuring range	0 - 300 kN	0 - 600 kN
scale graduation	10 kN	10 kN
accuracy [T=20°C]	1,6%	1,0%
mass	3,5 kg	6,2 kg
temperature range	-10°C - +60°C	
protection class	IP 65	
maximum piston stroke	1mm	

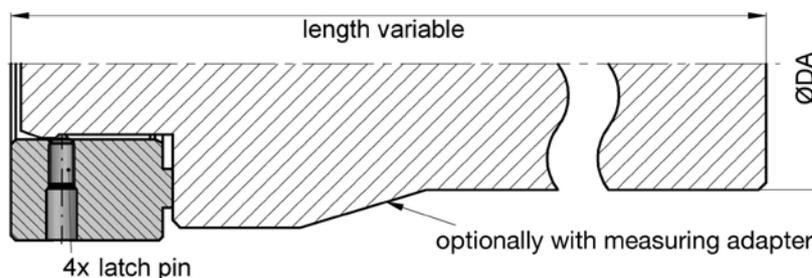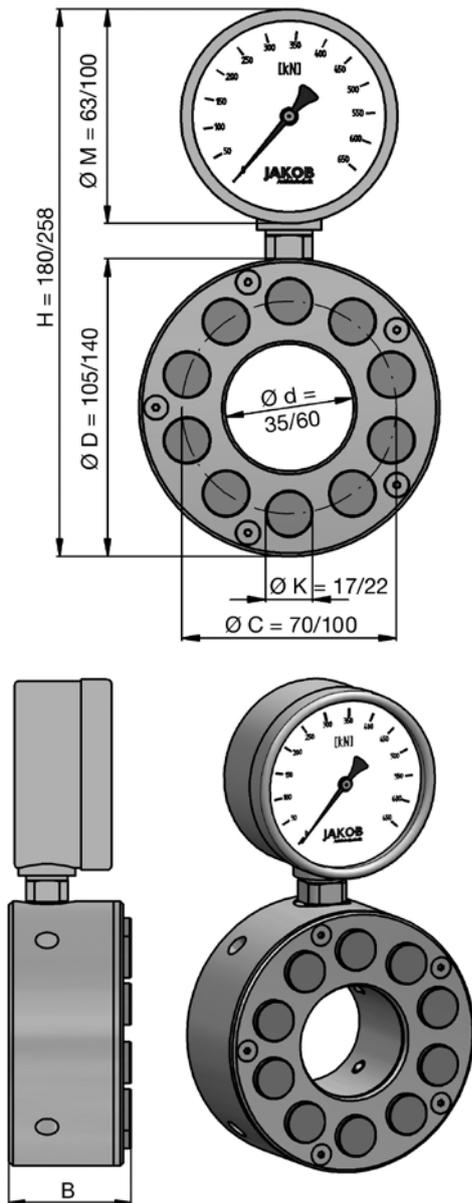

## General:

Hydraulic load cells of the HMD series are robust indicators that calculate axial compressive forces with median accuracy. The force is transferred analogously over pressure pistons and the hydraulic fluid to a manometer with a kN-indicator scale. The measuring system is autarkic, so there is no need of external or additional energy. Therefore static and dynamic forces can be detected in numerous applications of the entirety of mechanical engineering in an easy and economically priced way.

## System design - function:

The load cells are designed on the basis of the multi-piston-system. The compressive forces are transferred over several small pistons to the hydraulic fluid. In the series HMD-R which is in ring forms the pistons are arranged concentrically. The innovative principle allows the realization of load cells in every geometric configuration. The floating piston-overlay compensates construction and angle mistakes in a considerable dimension. High shearing forces should be avoided. Special piston seals guarantee an enduring and hermetic sealing of the fluid medium.

## Note:

During measurement, ensure that all pistons are pending the measuring surface with the complete pressure load area.

To ensure a flawless measuring function, the manometer-connection and the lock or fill screw should not be removed. Load cells are useless for measuring strong pulsating forces or high accelerations.

The inner diameter of the ring load cells is primed for the insertion of measuring adapter pieces using four ball latch pins. Customized adapter types are available on request (see example of use).

## Hydromechanical Spring Clamping Cylinders



# Hydromechanical Spring Clamping Systems I Series ZSF/ZDF

- /// mechanical clamping - hydraulic releasing
- /// high operational safety
- /// leak-proof and robust
- /// economical clamping solution

## General

Hydromechanical spring clamping systems work through interaction of mechanical and hydraulic systems. The clamping force is applied mechanically through a pre-loaded disk spring packet.

The two types are provided as spring clamping or spring pressure cylinders. The hydraulic pressure is only required for the release stroke during which the tie rod or thrust pin is lifted. This system guarantees the greatest reliability because the clamping force is maintained fully independent of the oil pressure or leak-losses. With the hydraulic unit's short operating times, this system is also cost-effective. The spring clamping cylinders of the ZSF and ZDF series provide sturdy and reliable clamping elements that can be used wherever sliding and movable machine parts need to be clamped or locked temporarily. Other applications are fixture construction and workpiece or tool clamping.


## Operational principle

The thrust or draw piston is pressurised reciprocally by the disk spring packet or hydraulic pressure. The spring packet is compressed with increasing oil pressure; the spring force increases. Under pressure, the corresponding nominal clamping force is reached as a reaction force of the disk spring packet. To release the thrust or draw piston, a higher hydraulic pressure is required, which, up to a maximum value, is proportional to the release stroke. The setting pressure is required only for precise force adjustment during initial installation. During the actual operating cycle, the cylinders are either pressureless or at release pressure. The corresponding pressure values can be seen in the spreadsheet.

In ZSF series spring clamping cylinders, a mandrel or a tie rod is threaded down and secured in the draw piston's thread hole (available on request as single piece or with special thread). The draw piston is protected against incorrect installation with a pin connection.

## Assembly and adjustment

- /// to operate, a hydraulic unit is needed which should be equipped with a manometer, a pressure cut-off valve, a solenoid valve, and a pressure switch unit
- /// fill the cylinders and lines at low pressure and bleed (cylinders are supplied unfilled)
- /// increase system pressure to the set pressure and maintain; align cylinder using the ring guide nut (ZSF), setscrews (ZDF-u) or fitting discs (ZDF-o) until the thrust piston or the clamp is free from play; fasten thrust piston with screws or secure the ring guide nut on the clamping cylinder
- /// release system pressure; set release pressure for the required release stroke; check the release stroke and adjust if necessary

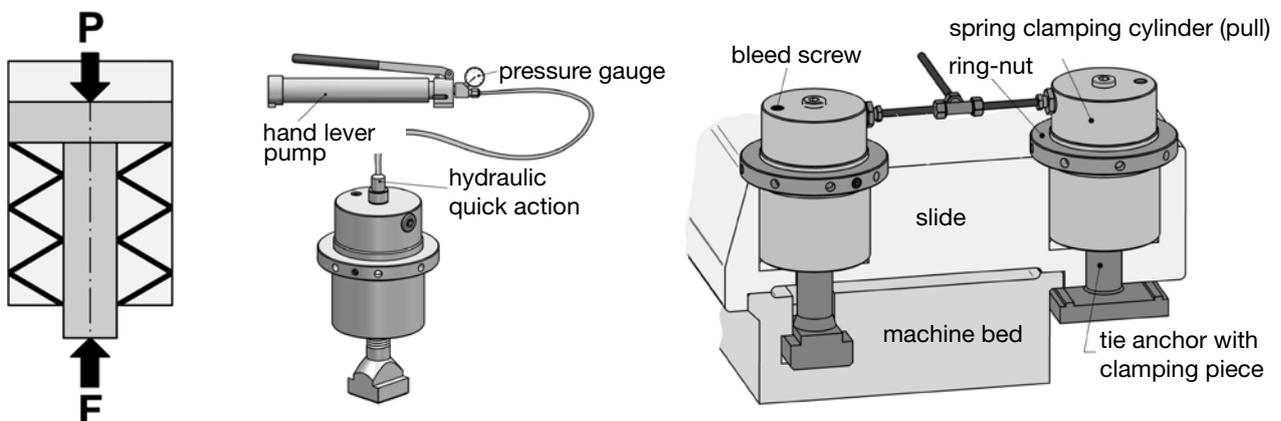


**Note:** If automatic clamping operation is not required, the temporary, manual hydraulic connection to a manually operated piston pump with a pressure gauge provides a cost effective alternative (see fig. at left).

# Spring Clamping Cylinder I Series ZSF

## Technical data:

ZSF Size	nominal clamping force [kN]	adjusting pressure [bar]	max release stroke [mm]	release pressure at 0,5 mm stroke [bar]	release pressure at 1,0 mm stroke [bar]	release pressure at max stroke [bar]	stroke volume at 1 mm stroke [cm <sup>3</sup> ]	mass approx. [kg]
1.600	16	135	2,0	170	210	290	1,3	2,0
2.500	25	135	1,6	160	185	230	2,0	3,0
4.000	40	150	2,0	170	190	240	2,8	4,5
6.300	63	175	1,5	190	210	235	3,8	6,8
10.000	100	210	1,5	250	280	320	5,0	8,5
16.000	160	210	1,2	240	275	295	7,9	21
20.000	200	210	1,2	240	270	290	11,3	26,5
25.000	250	190	1,6	210	235	260	14,3	41
35.000	350	190	1,0	210	230	230	20,1	60

temperature range: -30°C up to +100°C – mounting position: discretionary

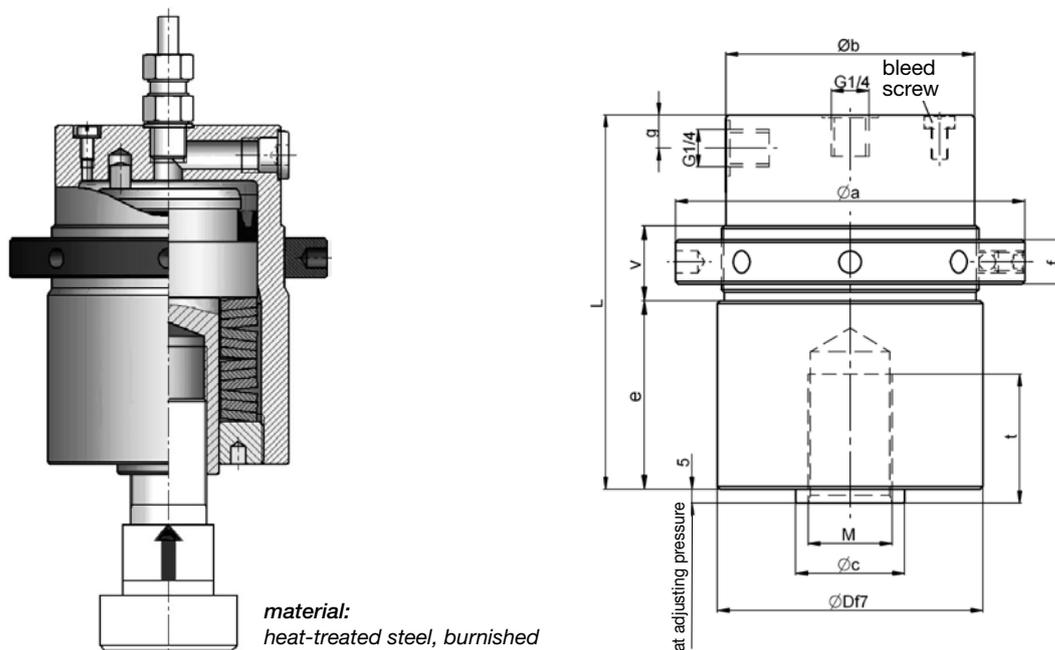

material:  
heat-treated steel, burnished

## Dimensions [mm]: length dimensions according to DIN ISO 2768 mH

ZSF Size	Ø D f7	Version-2" Ø D f7	Ø a	Ø b	Ø c	e	f	g	L	M	t	v	adjustment thread - ring nut
1.600	60	55	85	55	20	40	14	12	101	M 14 x 1,5	24	22	M 58 x 1,5
2.500	70	65	95	65	25	46	14	13	111	M 18 x 1,5	30	23	M 68 x 1,5
4.000	80	75	110	75	30	56	16	12	125	M 22 x 1,5	36	24	M 78 x 1,5
6.300	95	85	125	89	40	67	16	12	135	M 30 x 1,5	48	28	M 92 x 1,5
10.000	105	95	140	100	40	78	16	18,5	150	M 30 x 1,5	50	35	M 102 x 1,5
16.000	142	130	180	137	50	75	32	22	170	M 38 x 1,5	50	50	M 140 x 2
20.000	150	-	190	143	57	92	40	22	200	M 45 x 1,5	60	58	M 148 x 3
25.000	170	-	220	163	70	100	40	22	230	M 45 x 1,5	60	58	M 168 x 3
35.000	200	-	250	192	80	100	45	47	240	M 52 x 1,5	70	65	M 198 x 3

**Note Version-2:** Sizes 1.600 to 10.000 are available alternatively with smaller external diameter "D" cylinder housing according to column "-2". Other thread sizes or through holes available on request.


Ordering example: ZSF 25.000 / ZSF 6.300 - 2

# Spring Clamping Cylinder I Series ZDF-o

- /// mechanical clamping – hydraulic releasing
- /// high operational safety // leak-proof and robust
- /// temperature range: -30°C up to +100°C // mounting position discretionary

## Technical data:

ZDF-o size	nominal clamping force [kN]	adjusting pressure [bar]	release pressure at 0,5 mm stroke [bar]	release pressure at 1,0 mm stroke [bar]	stroke volume at 1 mm stroke [cm <sup>3</sup> ]	mass approx. [kg]
2.500	25	130	160	195	2	3
4.000	40	200	240	280	3	4,4
6.300	63	180	200	225	4	6,0
10.000	100	240	270	300	5	12
16.000	160	205	235	265	8	23
25.000	250	200	220	245	14	35

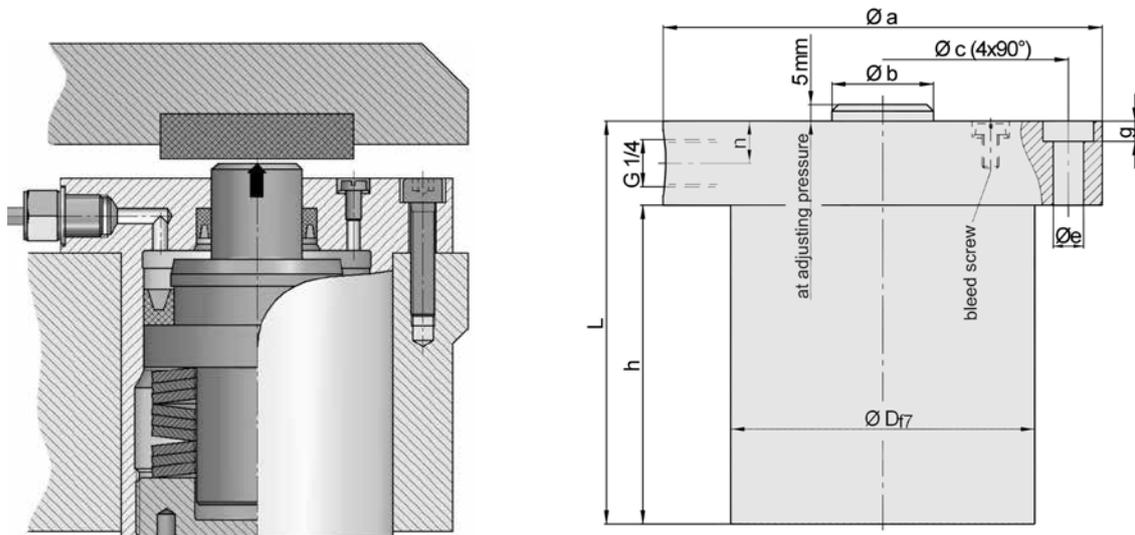

**material:**  
heat treated steel, burnished or nitro carburized

Dimensions [mm]: length dimensions according to DIN ISO 2768 mH

ZDF-o	Ø D	Ø a	Ø b	Ø c	Ø e	g	h	L	n
2.500	70	95	20	82	6,5	7	75	100	12,5
4.000	80	120	30	100	9	9	85	110	12,5
6.300	90	130	30	110	9	9	95	120	12,5
10.000	115	160	30	140	11	10	120	145	12,5
16.000	150	198	40	175	13	12	130	160	15
25.000	180	230	50	205	13	12	140	170	15



Ordering example: ZDF-o 4.000

# Spring Clamping Cylinder I Series ZDF-u

- /// mechanical clamping – hydraulic release
- /// high operational safety // leak-proof and robust
- /// temperature range: -30°C to +100°C // mounting position discretionary

## Technical data:

ZDF-u Size	nominal clamping force [kN]	adjusting pressure [bar]	max release stroke [mm]	release pressure at 0,5 mm stroke [bar]	release pressure at 1,0 mm stroke [bar]	release pressure at max stroke [bar]	stroke volume at 1 mm stroke [cm <sup>3</sup> ]	mass approx. [kg]
2.500	25	160	1,2	205	250	270	2,0	3,8
4.000	40	200	1,5	240	280	320	2,3	5,7
6.300	63	180	1,0	205	230	230	4	7,8
10.000	100	210	1,0	240	270	270	6	14
16.000	160	205	1,5	250	290	330	9	25
25.000	250	200	1,5	230	260	300	13	34

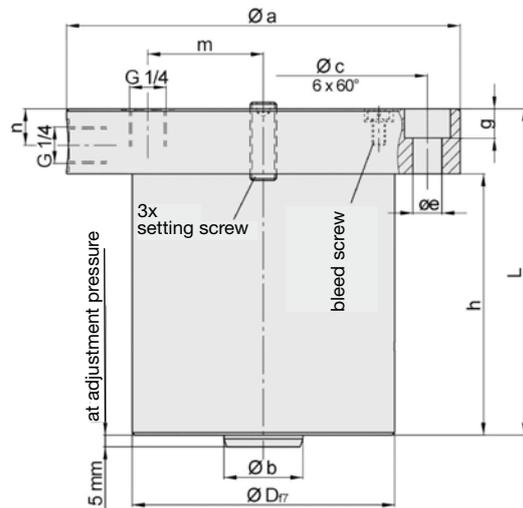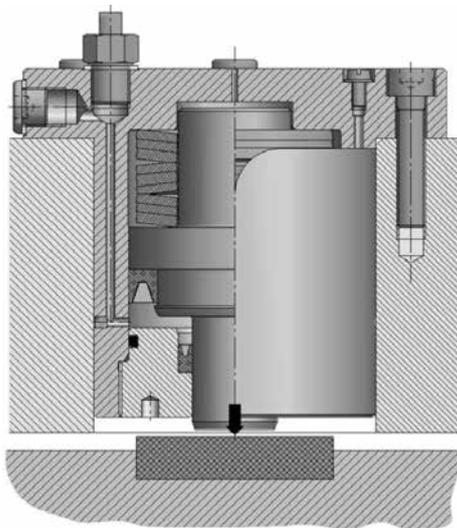

**material:**  
heat treated steel, burnished or nitro carburized


## Dimensions [mm]: length dimensions according to DIN ISO 2768 mH

ZDF-u	Ø D	Ø a	Ø b	Ø c	Ø e	g	h	L	m	n
2.500	75	105	20	90	6,5	7	85	110	30	14
4.000	90	138	30	115	11	10	90	115	37	14
6.300	100	150	30	125	11	10	100	125	44	14
10.000	120	170	30	145	12,5	12	125	150	51	14
16.000	150	210	40	185	12,5	12	140	170	65	15
25.000	180	230	50	205	12,5	12	150	180	80	15

Ordering example: ZDF-u 6.300


# Operation Manual - Slide Clamping I ZSF

1.

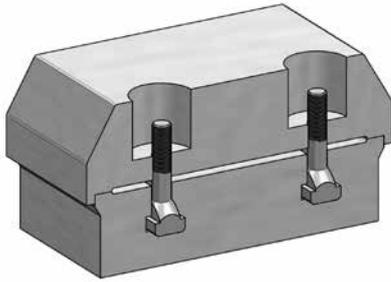


T-bolt screw or tension bolt installation (consider twist lock)

2.




adjust ring nut to mounting position (M) and lock

3.

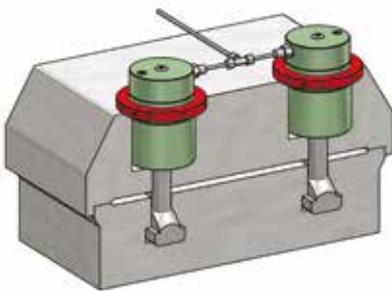


installation of cylinder, hydraulics -> bleeding of cylinder

4.

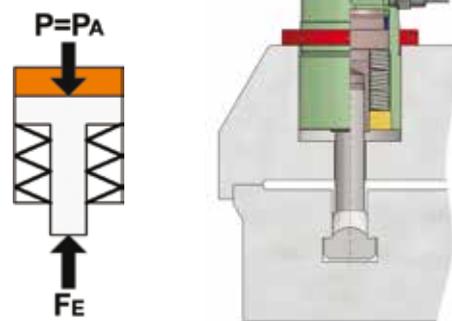


load cylinder with adjusting pressure  $P_A$  - disk spring package is compressed - T-bolt screw is released by stroke of pressure piston

5.

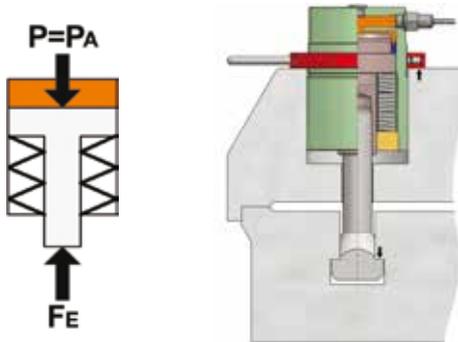


turn ring nut until ring nut and tensioning bolt are at mechanical stop - lock ring nut with screw

6.

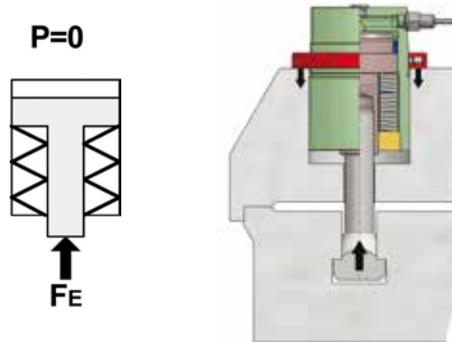


release hydraulic pressure -  $P = 0$  bar - clamping force of disk spring package =  $F_N$

7.

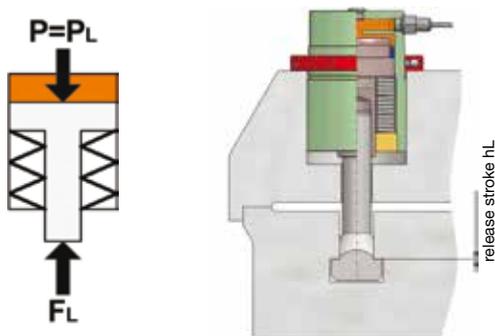

load with release pressure  $P_L$ , disk spring package is compressed further

8.

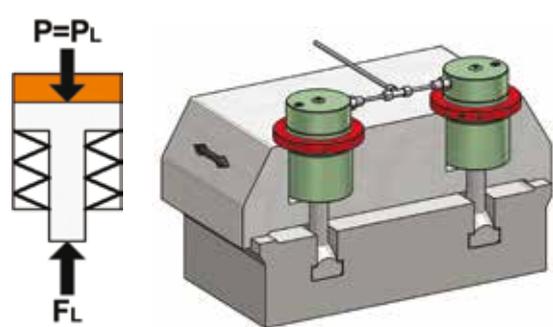

T-bolt screw and tensioning bolt are in release position. Slide can be moved axially


# Sectional Rail Couplings




# Sectional Rail Couplings I Technical Information

JAKOB Antriebstechnik offers sectional rail couplings that can be used with all current sectional rails. They are attached to existing sectional rails of various brands either directly or via adapter plates, which makes them an excellent choice for retrofitting. They can be disconnected either vertically or horizontally. The patented force amplification via wedge clamping mechanic is able to compensate a gap of up to 5mm between active and passive part. This clamping kinematic ensures high stiffness and precision of the connection. The generation of the clamping force can be achieved either manually by the operating hex head or pneumatically (PN=6 bar). High operational safety is ensured by electrical indication of clamping status and maintaining of minimal clamping force even in case of pressure loss.


## Design Layout - Type PKV

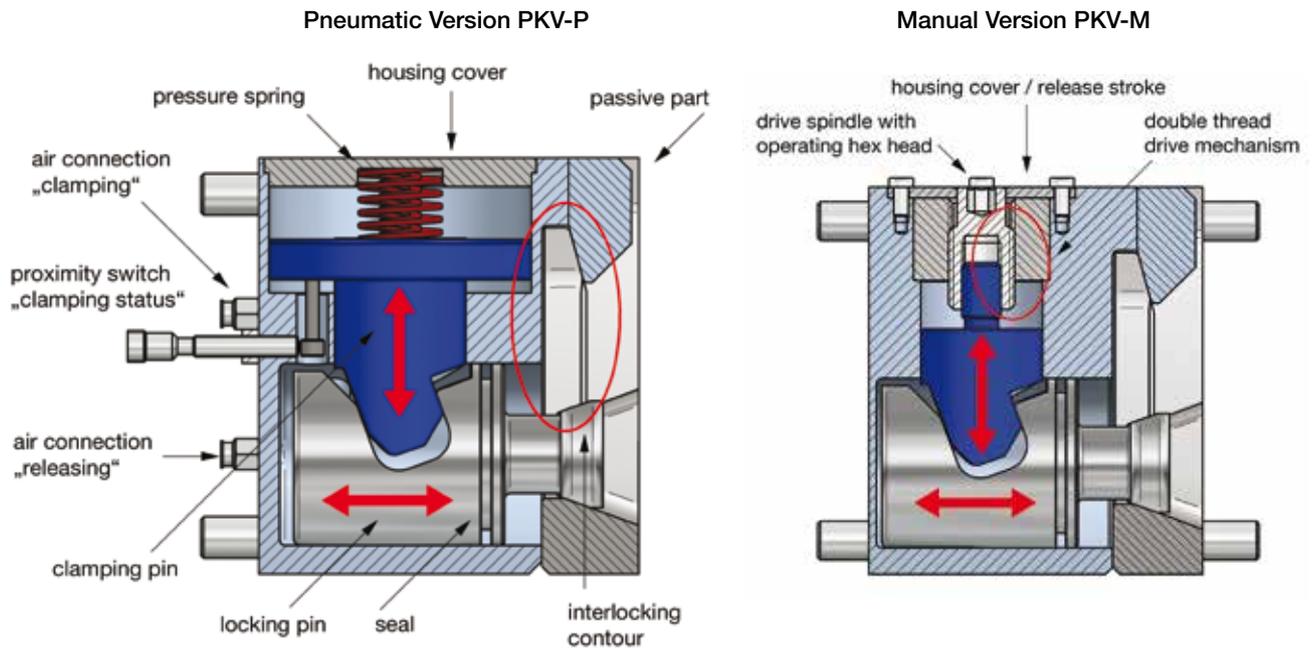

## Design Layout - Type PKH

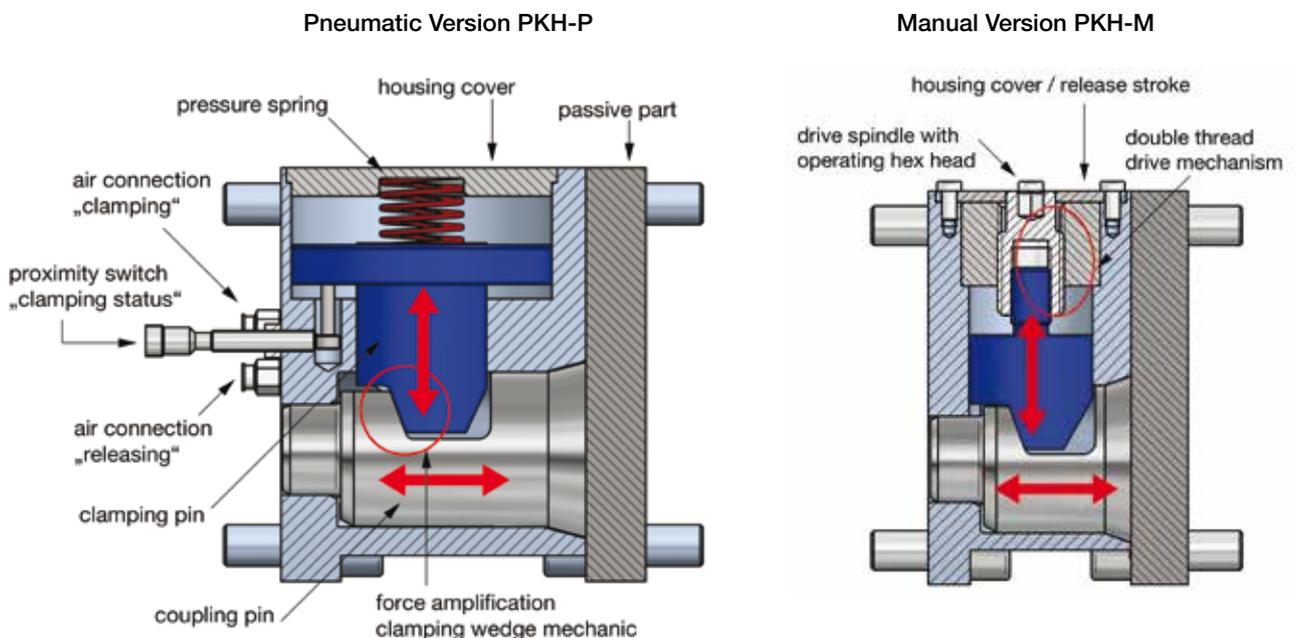

# Sectional Rail Couplings I Technical Information

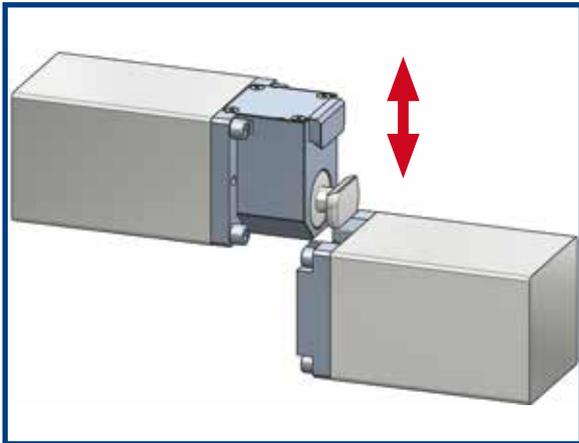


## PKV - Design Characteristics

The coupling is comprised of an active and a passive part made from tempered steel.

In the active part, the clamping force is generated by a combination of an axially sliding locking bolt and a mechanical clamping gearbox. This design allows for high clamping forces and dynamic stiffness while keeping weight at a minimum. For tool changing, a vertical stroke "K" (see data sheet) is required.

Type PKV is available in two different versions - the fully automated pneumatically driven PKV-P and the manually operated PKV-M.

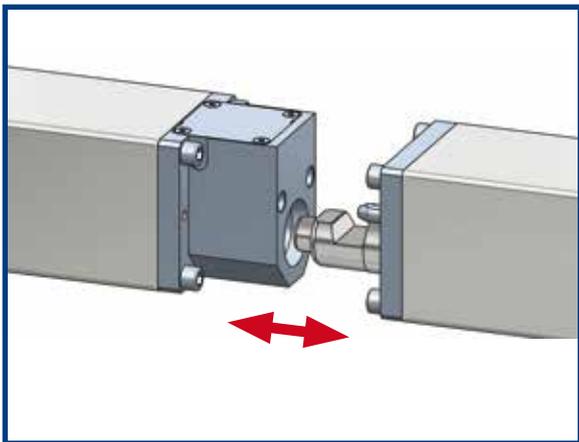

## PKH - Design Characteristics

The coupling is comprised of an active and a passive part made from tempered steel.

In the active part, the clamping force is generated via the use of a vertically sliding clamping pin in combination with the coupling pin in the passive part. This design allows for high clamping forces and dynamic stiffness while minimizing weight and clamping times.

For tool changing, a horizontal coupling distance "K" (see data sheet) is required.

Type PKH is available in two different versions - the fully automated pneumatically driven PKH-P, as well as the manually operated PKH-M.


## Design Characteristics

- /// horizontally or vertically joinable
- /// manual or pneumatic clamping
- /// high clamping forces through wedge clamping kinematic
- /// high dynamic stiffness - very short clamping times
- /// maintained minimal clamping forces even in case of pressure loss
- /// compact dimensions - lightweight
- /// electrical indication of clamping status
- /// compensation of sectional rail offset of up to  $\pm 5\text{mm}$
- /// high accuracy and repeatability of tool position
- /// robust design made from tempered steel – corrosion-protected
- /// pre-centering via centering pin
- /// high durability - minimal maintenance costs



# Sectional Rail Coupling I Type PKH

horizontal linear coupling for automatic or manual clamping

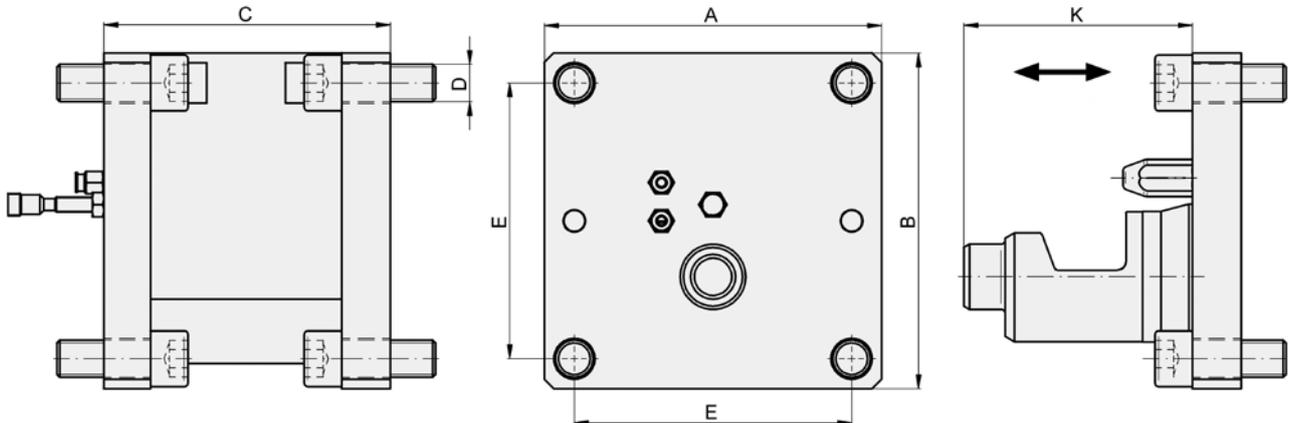

Technical data and dimensions [mm]: measure of length according to DIN ISO 2768 mH

type	*operating forces			**bending	TA	weight	couple	compen-	dimensions [mm]				
	FB [kN]	FBmin [kN]	FQ [kN]	moment [Nm]	(type M) [Nm]	[kg]	distance K	sation hor.	width A	height B	length C	bore pattern D	pattern E
PKH-M-80x80	20	-	25	1000	20	2,7	53	3	80	80	68	4x M8	66
PKH-P-80x80	12,5	3	25	1000	-	2,9	53	3	80	80	80	4x M8	66
PKH-M-100x100	30	-	35	2000	25	4,8	64	4	100	100	81	4x M10	82
PKH-P-100x100	20	4	35	2000	-	5,1	64	4	100	100	93	4x M10	82
PKH-M-120x120	40	-	60	3000	30	7,2	65	4,5	120	120	83	4x M12	100
PKH-P-120x120	30	6,5	60	3000	-	8,7	82	4,5	120	120	115	4x M12	100
PKH-M-140x140	60	-	70	6500	35	10,6	74	5	140	140	94	4x M14	115
PKH-P-140x140	40	10	70	6500	-	12,7	88	5	140	140	128	4x M14	115
PKH-M-160x160	70	-	100	7500	40	15,2	80	5	160	160	105	4x M16	132
PKH-P-160x160	50	11,5	100	7500	-	18,6	109	5	160	160	140	4x M16	132
PKH-M-180x180	80	-	150	13000	50	23	93	6	180	180	122	4x M20	148
PKH-P-180x180	60	14	150	13000	-	26	108	6	180	180	153	4x M20	148
PKH-M-200x200	80	-	150	15000	50	29	95	7	200	200	124	4x M20	168
PKH-P-200x200	75	18,5	150	15000	-	34,7	126	7	200	200	173	4x M20	168

\*FB - tolerable axial operating force at nominal pressure PN = 6 bar  
 FBmin - minimal operating force at no pressure P=0 bar  
 FQ - tolerable vertical operating force (pressure-independent)


\*\*tolerable operating values M x / y / z at nominal pressure PN=6 bar

materials: tempered steel - nitrated

precision ±0,1 mm

**Note:** version with customer-specific energy coupling for supplying the changing rail with power etc. or different sectional profiles (A x B) on demand.

manual clamping with operating hex head - top view:  
 TA actuation torque for version „M“

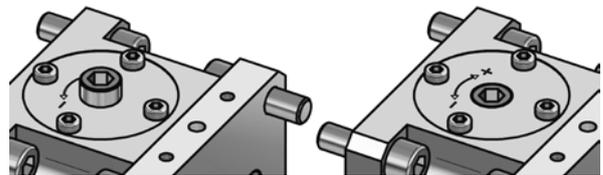

release position

clamping position

order example:

sectional rail coupling

PKH - P - 140 x 140 - active part


„P“ - automatic clamping (pneumatic) / „M“ - manual clamping

Size 140 x 140 - sectional profile

active part / passive part

# Sectional Rail Coupling I Type PKV

vertical linear coupling for automatic or manual clamping

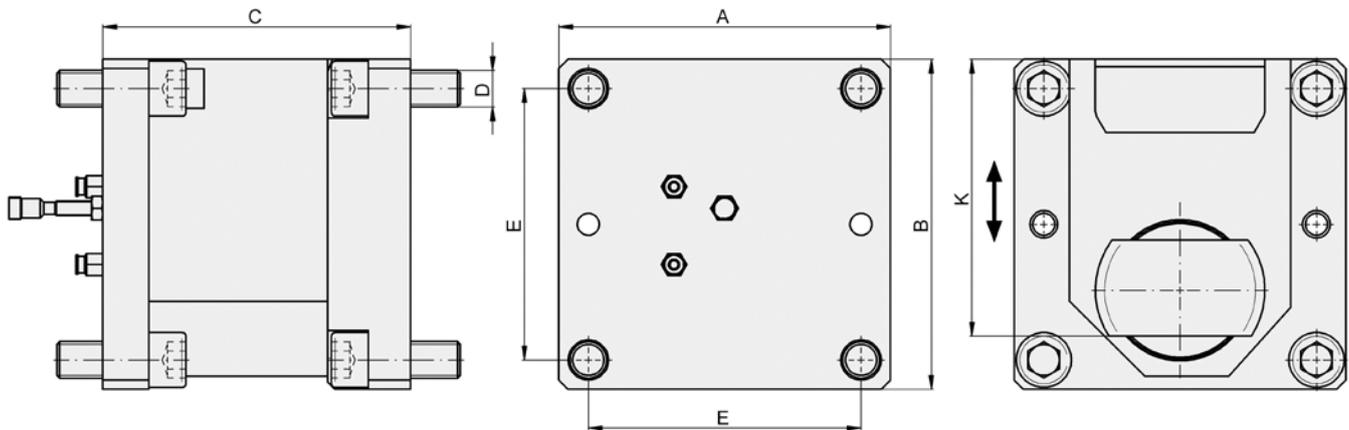

Technical data and dimensions [mm]: measure of length according to DIN ISO 2768 mH


Type	*operating forces				**bending	TA	weight	couple	compen-		dimensions [mm]				
	FB [kN]	FBmin [kN]	FR [kN]	FRmin [kN]	moment [Nm]	(type M) [Nm]	[kg]	distance K	hor.	ver.	width A	height B	length C	bore D	pattern E
PKV-M-80x80	20	-	25	-	1000	20	2,5	71	1,5	1,5	80	80	75	4x M8	66
PKV-P-80x80	12,5	3	20	4,5	1000	-	2,6	71	1,5	1,5	80	80	80	4x M8	66
PKV-M-100x100	30	-	35	-	2000	25	4,8	91	2,5	2	100	100	91	4x M10	82
PKV-P-100x100	20	4	30	6	2000	-	4,8	89	2,5	2	100	100	95	4x M10	82
PKV-M-120x120	40	-	60	-	3000	30	8	105	2	2	120	120	109	4x M12	100
PKV-P-120x120	30	6,5	50	10,5	3000	-	8,7	105	2,5	2	120	120	120	4x M12	100
PKV-M-140x140	60	-	80	-	6500	35	12	122	2,5	2,5	140	140	120	4x M14	115
PKV-P-140x140	40	8,5	65	14	6500	-	12	122	3	2,5	140	140	134	4x M14	115
PKV-M-160x160	70	-	100	-	7500	40	18	135	3	2,5	160	160	137	4x M16	132
PKV-P-160x160	50	11	80	17,5	7500	-	18	135	3	2,5	160	160	145	4x M16	132
PKV-M-180x180	80	-	130	-	13000	50	25	154	4	3	180	180	152	4x M20	148
PKV-P-180x180	60	17	100	28	13000	-	26	154	4	3	180	180	164	4x M20	148
PKV-M-200x200	80	-	130	-	15000	50	29	168	4	3	200	200	164	4x M20	168
PKV-P-200x200	75	17	125	28	15000	-	35	168	5	3,5	200	200	184	4x M20	168

\*FB - tolerable axial operating force at nominal pressure PN = 6 bar  
 FBmin - minimal operating force at no pressure P=0 bar  
 FR - tolerable vertical locking force at PN= 6 bar  
 FRmin - minimal locking force at no pressure P=0 bar

\*\*tolerable operating values M x / y / z at nominal pressure PN=6 bar  
 materials: tempered steel - nitrated  
 precision ±0,1 mm

**Note:** version with customer-specific energy coupling for supplying the changing rail with power etc. or different sectional profiles (A x B) on demand.

manual clamping with operating hex head - top view:  
 TA operation torque for version „M“

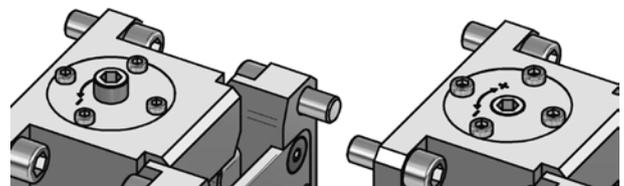

release position

clamping position

order example: sectional rail coupling PKV - P - 140 x 140 - active part

„P“ - automatic clamping (pneumatic) / „M“ - manual clamping \_\_\_\_\_

Size 140 x 140 - sectional profile \_\_\_\_\_

active part / passive part \_\_\_\_\_

**OTT-Jakob Spanntechnik GmbH**  
Industriestr. 3-7 · 87663 Lengenwang  
Fon: (+49) 83 64 9821 0 · Fax: (+49) 83 64 9821 10  
info@ott-jakob.de · www.ott-jakob.de



**Multitec**  
Ressestr. 6 · 87459 Pfronten  
Fon: (+49) 83 61 - 92 594-0 · Fax: (+49) 83 61 - 92 594-33  
info@multitec-jakob.de · www.multitec.net



**ALLMATIC-Jakob Spannsysteme GmbH**  
Jägersmühle 10 · 87647 Unterthingau  
Fon: (+49) 83 77 929 0 · Fax: (+49) 83 77 929 380  
info@allmatic.de · www.allmatic.de



**JAKOB Antriebstechnik GmbH**  
Daimler Ring 42 · 63839 Kleinwallstadt  
Fon: (+49) 60 22 2208 0 · Fax: (+49) 60 22 2208 22  
info@jakobantriebstechnik.de  
www.jakobantriebstechnik.de



**GPA-Jakob Pressenautomation GmbH**  
Greschbachstr. 15 · 76229 Karlsruhe  
Fon: (+49) 721 6202 0 · Fax: (+49) 721 6202 222  
info@gpa-jakob.de · www.gpa-jakob.de



**OPTIMA Spanntechnik GmbH**  
Postfach 52 · 57584 Scheuerfeld  
Fon: (+49) 2741 9789 0 · Fax: (+49) 2741 9789 10  
info@optima-spanntechnik.de · www.optima-spanntechnik.de



**JAKOB Vakuumtechnik GmbH**  
Daimler Ring 42 · 63839 Kleinwallstadt  
Fon: (+49) 60 22 2208 25 · Fax: (+49) 60 22 2208 46  
info@jakobvakuumtechnik.de · www.jakobvakuumtechnik.de